





KL7000LED Beacon - Magnetic Mount

KL7000LED Beacon, with the latest LED technology provides an optimum signal image with low power consumption featuring rotating LED light function. The combination of thermal management and optics in one module makes a remarkably compact design possible. Impact and dirt resistant PMMA lens.

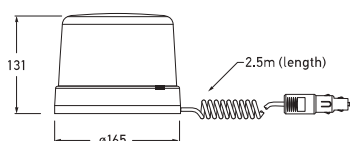

| Part Number | 1610 | AMBER |
|-------------------|--|---|
| Mounting | Magnetic mounting on horizontal surfaces. | |
| Voltage | Multivolt™ for optimum brightness at input voltages from 10 to 32 volts. | |
| Power Consumption | 10W | |
| Protection | IP 5KX (Protection against dust) IP X4K (Protection against splashing water from all directions. With higher pressure) IP X9K (Protection against high-pressure cleaner, specific for road vehicles) | |
| Flash Rate | Simulated rotation 120-133rpm (2.0-2.2 Hz) | |
| Cable Length | Spiral cable extends to 2,5m | |
| RF Suppression | CISPR25 Class 5 | |
| Compliance | ECE R65/00 TA1 | ECE R10  |

Caution: Mounting of Magnetic Base Revolving Lamps

Due to HELLA being unable to control the condition of the mounting surface or the potential forces that may occur during deceleration, fitment of warning lamps with a magnetic base cannot be recommended for use on moving vehicles.