




RotaLED Beacons

RotaLED Beacon, with the latest LED technology provides an optimum signal image with low power consumption featuring rotating LED light function. The combination of thermal management and optics in one module makes a remarkably compact design possible. Impact and dirt resistant Polycarbonate lens.



P/N 1613

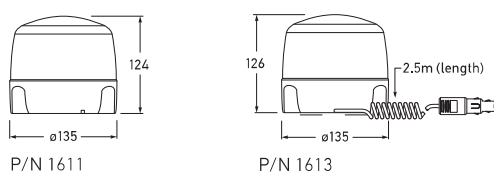

Part Number	1611 (Fixed Mount)	AMBER
	1613 (Magnetic Mount)	
Mounting	Fixed mount: Upright, fixed mounting on horizontal surfaces. Magnetic mount: Magnetic mounting on horizontal surfaces.	
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 32 volts	
Power Consumption	10W	
Protection	IP 5KX (Protection against dust) IP X4K (Protection against splashing water from all directions. With higher pressure) IP X9K (Protection against high-pressure cleaner, specific for road vehicles)	
Flash Rate	Simulated rotation 120-133rpm (2.0-2.2 Hz)	
Cable Length	P/N 1611: Pre-wired with 120mm cable P/N 1613: Spiral cable extends to 2,5m	
RF Suppression	CISPR25 Class 5	
Compliance	ECE R65/00 TA1	ECE R10

Caution: Mounting of Magnetic Base Revolving Lamps

Due to HELLA being unable to control the condition of the mounting surface or the potential forces that may occur during deceleration, fitment of warning lamps with a magnetic base cannot be recommended for use on moving vehicles.