





## K-LED 2 Beacon - Magnetic Mount

K-LED low profile beacons are the ideal choice wherever beacons risk interference with radio communications. Featuring 20 high power LEDs providing high light output for best visibility. An automatic day/night sensor adjusts brightness to avoid glare discomfort at night, 14 different flashing and 2 rotating patterns.

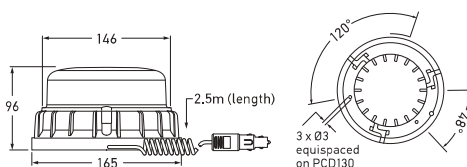

Part Number	1614-MAG	AMBER
Mounting	Magnetic mounting on horizontal surfaces	
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 32 volts	
Power Consumption	30W max.	
Protection	Reverse polarity and Transient Spike Circuit protection IP 67 (Protection against dust and temporary water immersion)	
Flash Rate	Simulated rotation 120rpm (2.0 Hz)	
Cable Length	Spiral cable extends to 2.5m	
RF Suppression	CISPR25 Class 5	
Compliance	ECE R65/00 TA2	ECE R65 TR2 SAE J 845 Class 1 

### Caution: Mounting of Magnetic Base Revolving Lamps

Due to HELLA being unable to control the condition of the mounting surface or the potential forces that may occur during deceleration, fitment of warning lamps with a magnetic base cannot be recommended for use on moving vehicles.