




K-LED 2 Beacon - Fixed Mount

K-LED low profile beacons are the ideal choice wherever beacons risk interference with radio communications, Featuring 20 high power LEDs providing high light output for best visibility, An automatic day/night sensor adjusts brightness to avoid glare discomfort at night. 14 different flashing and 2 rotating patterns.



P/N 1616

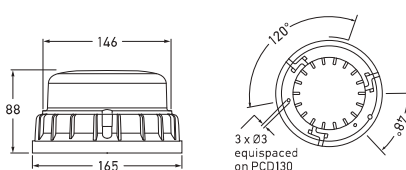

Part Number	1614	AMBER
	1616	RED
Mounting	Fixed mounting on horizontal surfaces	
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 32 volts	
Power Consumption	30W max.	
Protection	Reverse polarity and Transient Spike Circuit protection IP 67 (Protection against dust and temporary water immersion)	
Flash Rate	Simulated rotation 120rpm (2.0 Hz)	
Cable Length	Pre-wired with 150mm cable	
RF Suppression	CISPR25 Class 5	
Compliance	ECE R65/00 TA2	ECE R65 TR2 SAE J 845 Class 1 