



P/N 1728



P/N 1729



P/N 1735

Part Number	12 VOLT		24 VOLT	
	1728		1728-24V	AMBER
	1726		1726-24V	BLUE



Part Number	12/24 VOLT		AMBER
	1729 (Magnetic mount)		
	1735 (Flexibase mount)		
Current Draw	12V 24V	5.5A 3.5A	
Power Consumption	12V - 55W 24V - 70W		
Rotation	160rpm		
RF Suppression	Conducted Class 5 (CISPR25).		
Protection	IP 5K4K (Protection against dust and water splashing with increased pressure) IP X9K (Protection against high-pressure/steam jet cleaning)		
Bulbs to Suit	12V 24V	C1255 C2470	
Spare Parts	9.1726.01 ● Blue lens 9.1727.01 ● Red lens 9.1728.01 ● Amber lens 9.1737.91 Two drive belts 8007 2 Pole beacon mount - Pipe 8007FM 2 Pole beacon mount - Flat mount 8007RA 2 Pole beacon mount - Flat angle mount 8008 2 Pole beacon mount - Threaded mount		
Compliance	ECE R65/00	e1 1740	

### Revolving Beacon KL 7000

KL 7000 high performance revolving beacon with light values well above the minimum requirements. All KL 7000 beacons can be operated on 12 or 24V by changing the bulb. The halogen bulb is replaced from the rear of the reflector eliminating the need to touch the highly polished reflector surface. A twin belt drive ensures a smooth and quiet operation.




P/N 1726



P/N 1729

P/N 1735

HELLA does not recommend the magnetic base version for use on a moving vehicle (see page 188). See page 203 for spare part images.

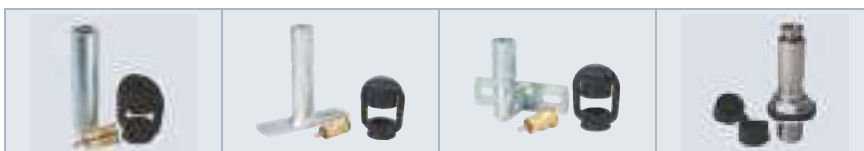

P/N 8007

P/N 8007FM

P/N 8007RA

P/N 8008