


### RotaLED Compact Beacon - Pipe Mount

A high performance LED beacon offering a double flash signal and 360° warning effect which provides ultimate attention in many applications. The impact-resistant dome and no moving parts provide maximum reliability. The flexible pipe mount softens impacts and minimises the risk of damage thanks to its special design.



<b>Part Number</b>	<b>2XD 013 979-011</b>	<b>AMBER</b>
Mounting	Tubular base incorporates connection plug. Must be used in conjunction with P/N 8007: 2 pole beacon mount - pipe, or other HELLA 2-pole beacon mounts.	
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 30 volts.	
Power Consumption	10W	
Protection	Same as P/N 1611 above	
Flash Rate	124 +/- 10 per minute, double flash.	
Cable Length	Pre-wired with 150mm cable	
Accessories	8007            2 Pole beacon mount - Pipe 8007FM       2 Pole beacon mount - Flat mount 8007RA       2 Pole beacon mount - Flat angle mount 8008            2 Pole beacon mount - Threaded mount	
RF Suppression	CISPR25 Class 5	
Compliance	ECE R65/00 TA1	ECE R10      SAE J845 Class 2

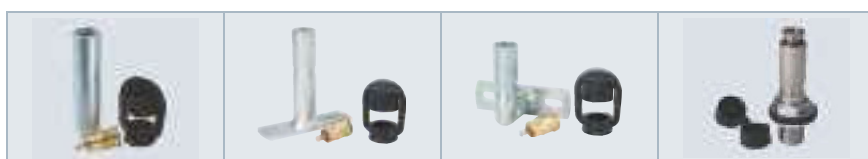

P/N 8007

P/N 8007FM

P/N 8007RA

P/N 8008



Extremely flexible pipe mount  
rubber base mechanism