



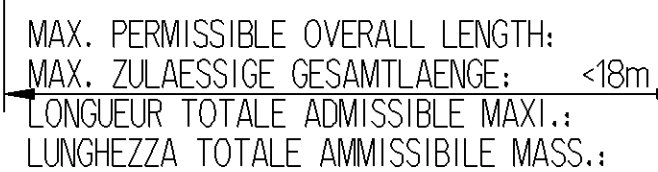

SURFACE PROTECTION :
OBERFLÄCHENSCHUTZ : * Sn
PROTECTION DE SURFACE:
PROTEZIONE SUPERFICI :

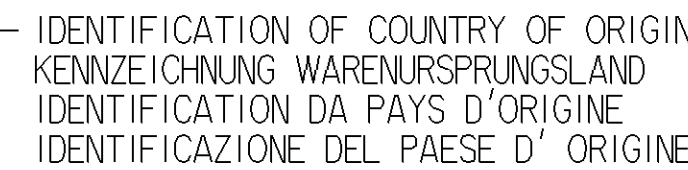

© INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED. SEE DOCUMENT:
EINBAUHNWEISE FÜR KABEL SIND ZU BEACHTEN. SIEHE DOKUMENT: 449 000 000 0 / 011
IL FAUT OBSERVER LES INDICATIONS POUR L'INSTALLATION DES CÂBLES. VOIR DOCUMENT:
SONO DA OSSERVARE GLI INDICAZIONI DI MONTAGGIO DEI CAVI. VEDERE DOCUMENTO:

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO TEILE NR. NO DE PIECE CODICE	$L[m]$ 449 133 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	$L = 12_m$ 449 133 120_ 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	$L_{min} = 0.1m$ $L_{max} = 18m$
TOLERANCES TOLERANZEN TOLERANZES TOLERANZA	$L < 10m$ $+0.100$ -0.050 $L > 10m$ $+0.125$ -0.075

General Specification: JED-334-C					Copyright WABCO®			
Further Technical Data:					Date _____ Signature _____			
Doc. Code:		Sheet: _____		To _____		CABLE WITH ABS SOCKET KABEL MIT ABS-STECKDOSE CABLE AVEC ABS-PRISE DE COURANT CAVO CON ABS-PRESA DI CORRENTE		
General Tolerances JED-261								
Range of Nominal Dimensions (± mm)								
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400			
Fire		0.5	1.0	1.5	2.0			
Medium	X	1.0	2.0	3.0	4.0			
Coarse		2.0	3.5	5.0	6.5			
						± 3°		
Tapped Holes acc.								
1) Tolerance Class Applied Crossmarked								
A 1		Prø/E		