


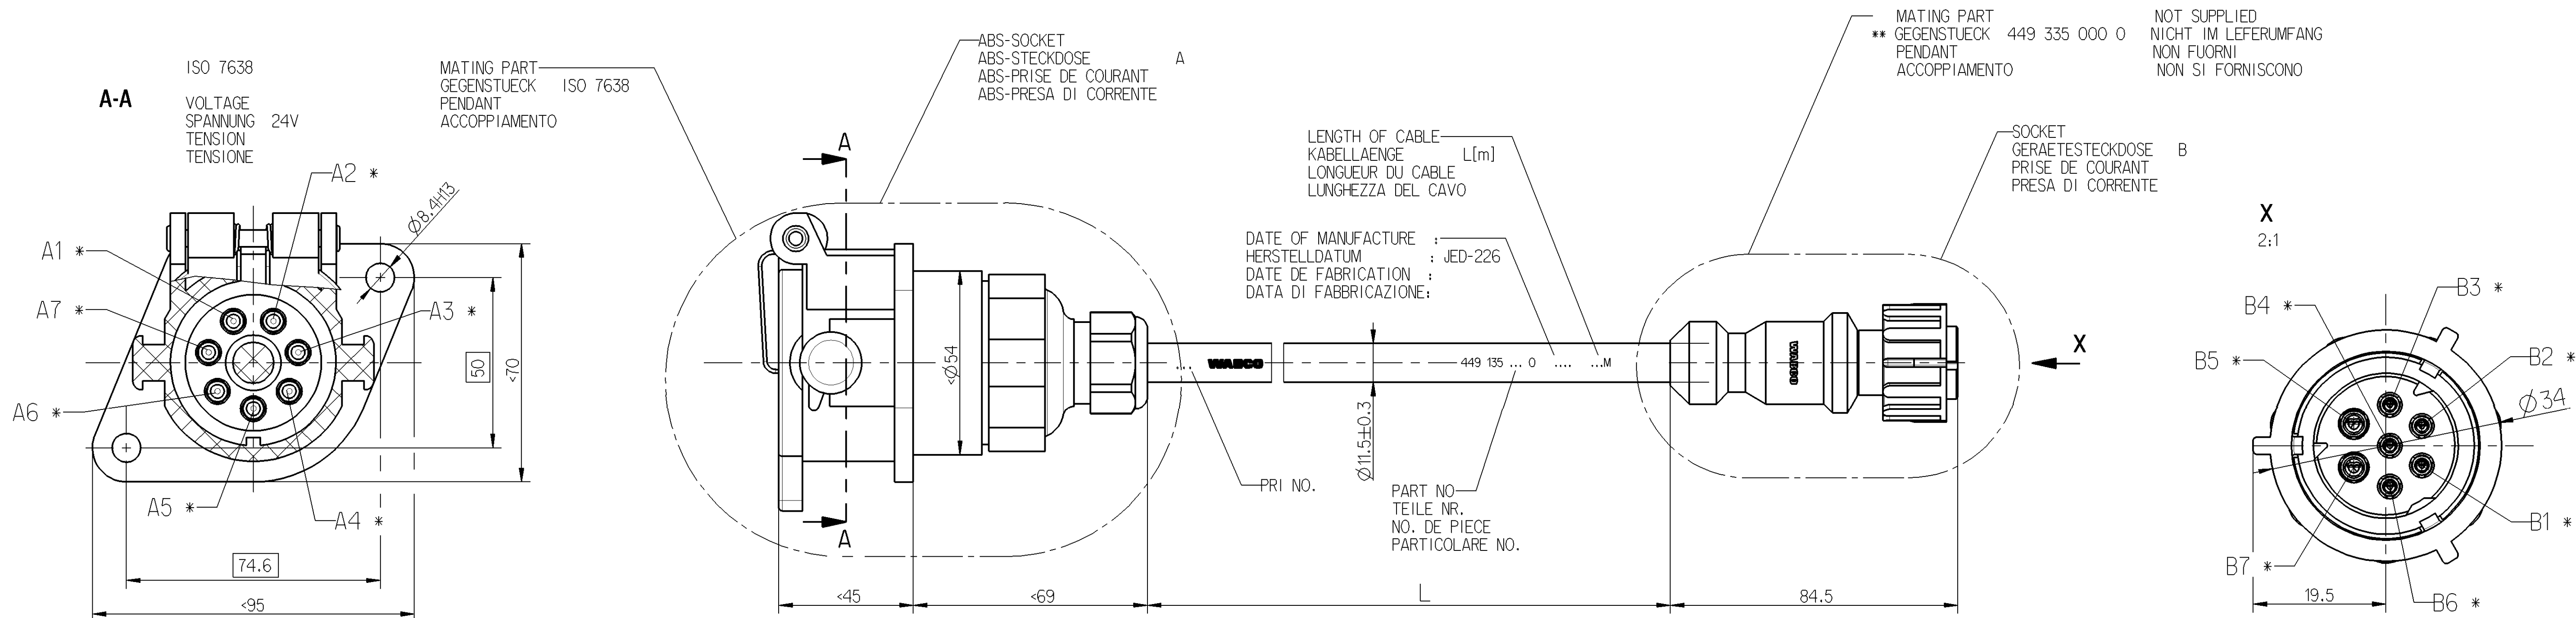

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH: -40 °C....+80 °C
GAMME D'APPLICATION THERMIQUE:
CAMPO TERMICO D'APPLICAZIONE :



RESISTANT TO : AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALT SPRAY
BESTÄNDIG GEGEN: LUFT, WASSER, MINERALÖL, BENZIN, DIESELÖL, SALZSPRÜHNEBEL
RESISTANT A : AIR, EAU, HUILE MINÉRALE, ESSENCE, GASOIL, BROUILLARD SALIN
RESISTENTE A : ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG) :
SCHUTZART (IN VERBINDUNG MIT STECKER) : A: IP 54
DEGRE DE PROTECTION (DANS CONNECTION AVEC FICHE) : B: IP 6K 7 / IP 6K 9K
GRADO DI PROTEZIONE (IN RELAZIONE CON SPINA) :

7-CORE CABLE
LEITUNG 7-ADRIK
CABLE A 7 CONDUCTEURS
CAVO A 7 CONDUTTORI

PVC ©
 $3 \times 1.5 \text{ mm}^2 + 2 \times 4 \text{ mm}^2 + 2 \times 1.0 \text{ mm}^2$

SURFACE PROTECTION :
OBERFLÄCHENSCHUTZ : * Sn
PROTECTION DE SURFACE:
PROTEZIONE SUPERFICI :

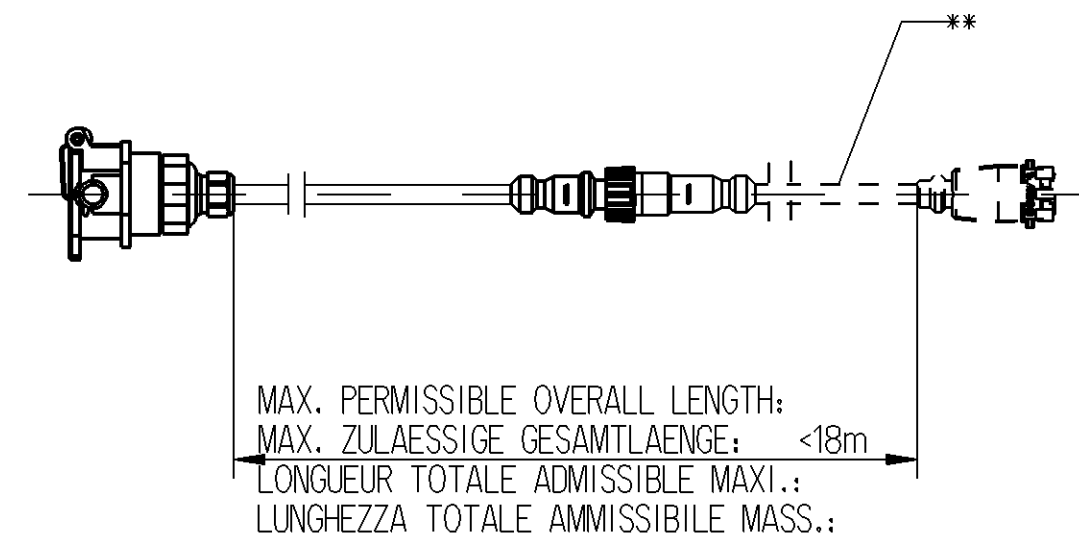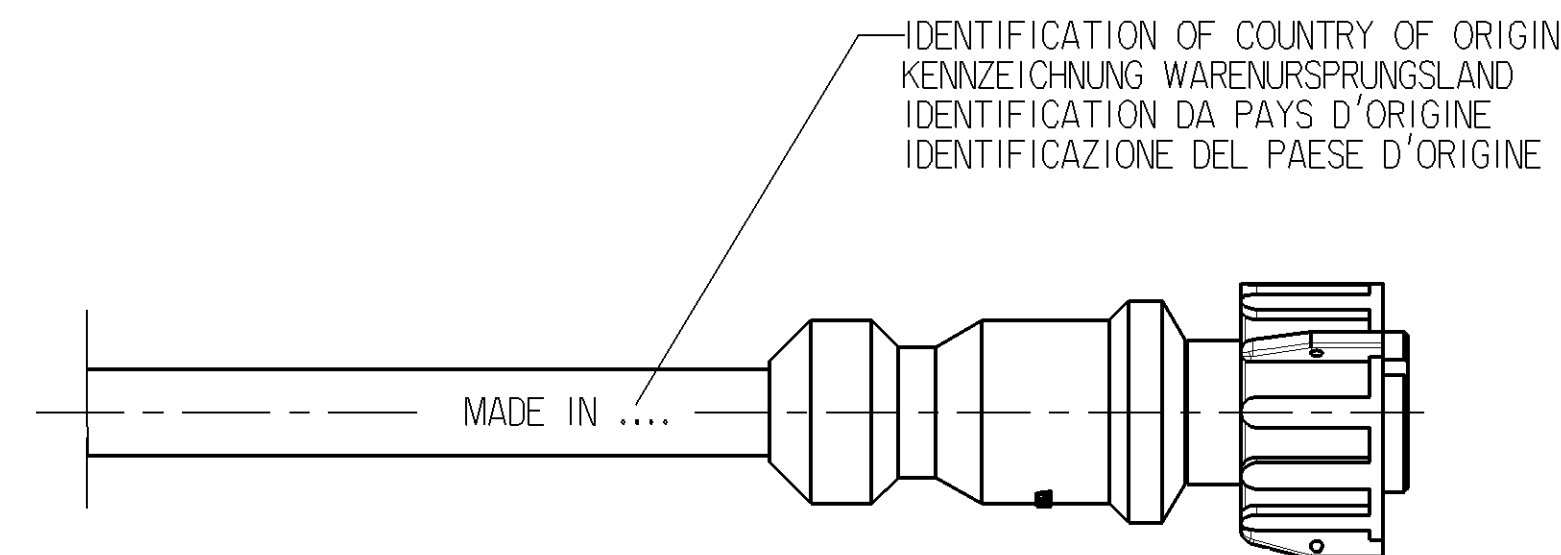

CHAMBER IN: KAMMER IN: A CHAMBRE EN: CAMERA IN:	CABLE KABEL CABLE CAVO CROSS SECTION QUERSCHNITT SECTION DE SEZIONE TRANSVERSALE	CHAMBER IN: KAMMER IN: B CHAMBRE EN: CAMERA IN:
1	4mm ²	7
2	1.5mm ²	6
3	1.5mm ²	4
4	4mm ²	5
5	1.5mm ²	3
6	1.0mm ²	2
7	1.0mm ²	1

© INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED. SEE DOCUMENT:
EINBAUINWEISE FÜR KABEL SIND ZU BEACHTEN. SIEHE DOKUMENT: 449 000 000 0 / 011
IL FAUT OBSERVER LES INDICATIONS POUR L'INSTALLATION DES CABLES. VOIR DOCUMENT:
SONO DA OSSERVARE GLI INDICAZIONI DI MONTAGGIO DEI CAVI. VEDERE DOCUMENTO:

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO. TEILE NR. NO DE PIECE CODICE	L[m] 449 135 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	L = 0,5m 449 135 Q05 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	L _{min} = 0.1m L _{max} = 18m
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	L < 10m +0.100 -0.050 L > 10m +0.125 -0.075

General Specification: JED-334-D						Copyright WABCO®		WABCO CABLE WITH ABS-SOCKET KABEL MIT ABS STECKDOSE CABO D'ALIMENTAZIONE CABO DI ALIMENTAZIONE					
Further Technical Data:						Date						Signature	
Doc. Code:		Sheet:		To		2009-08-13						Hornischmacher	
General Tolerances JED-261						2009-09-10						Gründler	
Range of Nominal Dimensions (± mm)						Revised							
Class	1)	≤ 50	50 ≤ 180	180 ≤ 400	> 400	Expert							
Fine		0,5	1,0	1,5	2,0	Gründler							
Medium	x	1,0	2,0	3,0	4,0								
Coarse		2,0	3,5	5,0	6,5								
						Mass		Material No.		Date of first issue: 1999-02-21			
						1:1				Doc.Code			
						2:1				Sheet			
						KG		449 135 000 0		053 ML 1/1			
						CAB System		Tech. Resp.		Replacement for			
Tapped Holes acc.						A 1		ECN-No.		Revision			
1) Tolerance Class Applied Crossmarked						Pro/E		150/167		2x C			
								6930		6930			