
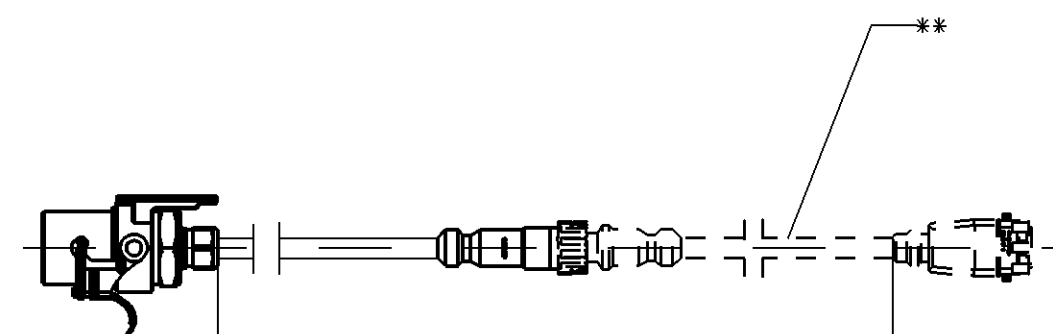
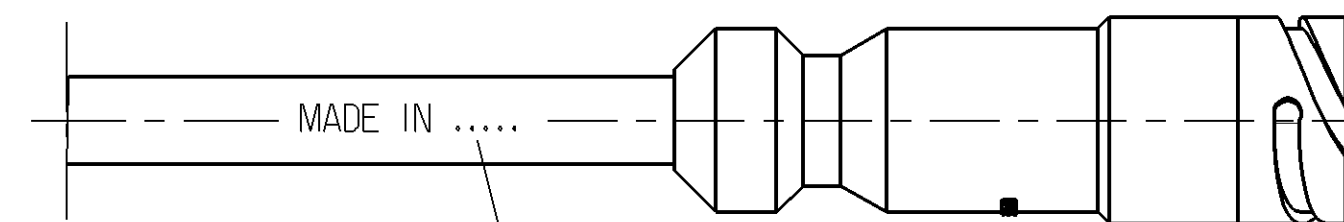


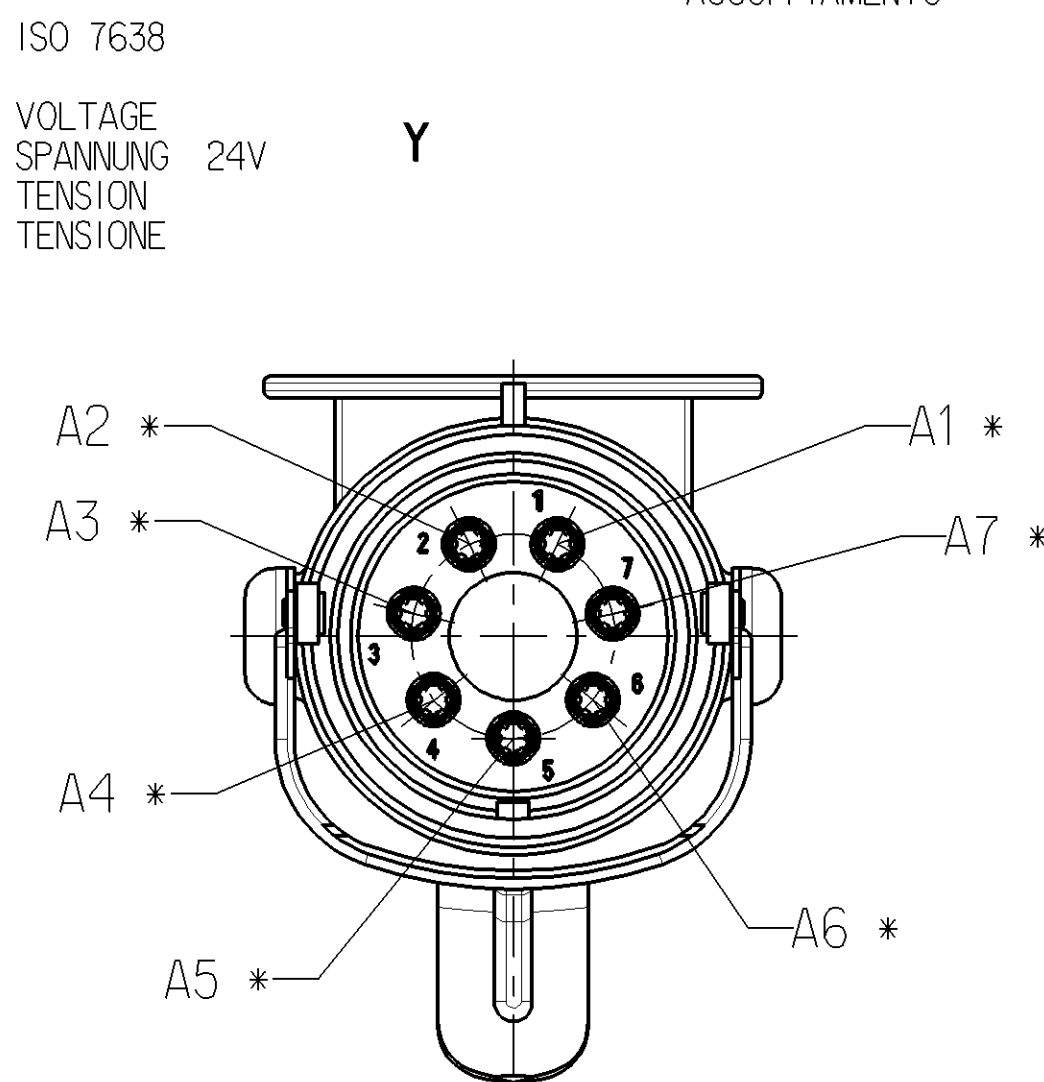

CHAMBER IN: KAMMER IN: A CHAMBRE EN: CAMERA IN:	CABLE KABEL CABLE CAVO CROSS SECTION QUERSCHNITT SECTION DE TRANSVERSALE SEZIONE TRANSVERSALE	CHAMBER IN: KAMMER IN: B CHAMBRE EN: CAMERA IN:
1	4mm ²	7
2	1.5mm ²	6
3	1.5mm ²	4
4	4mm ²	5
5	1.5mm ²	3
6	1.0mm ²	2
7	1.0mm ²	1

① INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED. SEE DOCUMENT:
EINBAUHNWEISE FUER KABEL SIND ZU BEACHTEN. SIEHE DOKUMENT: 449 000 000 0 / 011
IL FAUT OBSERVER LES INDICATIONS POUR L'INSTALLATION DES CABLES. VOIR DOCUMENT:
SONO DA OSSERVARE GLI INDICAZIONI DI MONTAGGIO DEI CAVI. VEDERE DOCUMENTO:

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO TEILE NR. NO DE PIECE CODICE	L [m] 449 233 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	L = 12_m 449 233 12 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	L _{min} = 0.1m L _{max} = 18m
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	L < 10m +0.100 -0.050 L > 10m +0.125 -0.075

THERMAL RANGE OF APPLICATION :
 THERMISCHER ANWENDUNGSBEREICH: -40 °C...+80 °C
 GAMME D'APPLICATION THERMIQUE:
 CAMPO TERMICO D'APPLICAZIONE :

RESISTANT TO : AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALT SPRAY
 BESTÄNDIG GEGEN: LUFT, WASSER, MINERALÖL, BENZIN, DIESELÖL, SALZSPRUEHNEBEL
 RESISTANT A : AIR, EAU, HUILE MINÉRALE, ESSENCE, GASOIL, BROUILLARD, SALIN
 RESISTENTE A : ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

DEGREE OF PROTECTION (IN CONNECTION WITH SOCKET) :
 SCHUTZART (IN VERBINDUNG MIT STECKDOSE) : A: IP 54
 DEGRÉ DE PROTECTION (DANS CONNECTION AVEC PRISE DE COURANT) : B: IP 6K 7 / IP 6K 9K
 GRADO DI PROTEZIONE (IN RELAZIONE CON PRESA DI CORRENTE) :

7-CORE CABLE
 LEITUNG 7-ADRIG PVC ①
 CABLE A 7 CONDUCTEURS 3x1.5mm² + 2x4mm² + 2x1.0mm²
 CAVO A 7 CONDUTTORI

SURFACE PROTECTION :
 OBERFLÄCHENSCHUTZ : * Sn
 PROTECTION DE SURFACE:
 PROTEZIONE SUPERFICI :

General Specifications: JED-334-O						Copyright WABCO®				WABCO					
Further Technical Data:						Date		Signature							
Doc. Code		Sheet		To		2009-08-11				Hornischmacher					
General Tolerances JED-261						2009-09-09				Grusindler					
Range of Nominal Dimensions (± mm)						Expert				Grusindler					
Class		1)		≤ 50		> 50 ≤ 180		> 180 ≤ 400		> 400		±3"			
Fine				0,5		1,0		1,5		2,0					
Medium		X		1,0		2,0		3,0		4,0					
Coarse				2,0		3,5		5,0		6,5					
Tapped Holes acc.						A 1		Pro/E				ECN-No. Revision Techn. Resp.		Replacement for	
1) Tolerance Class Applied Crossmarked										150167 2x D 6930		053 ML 1/1		-	