



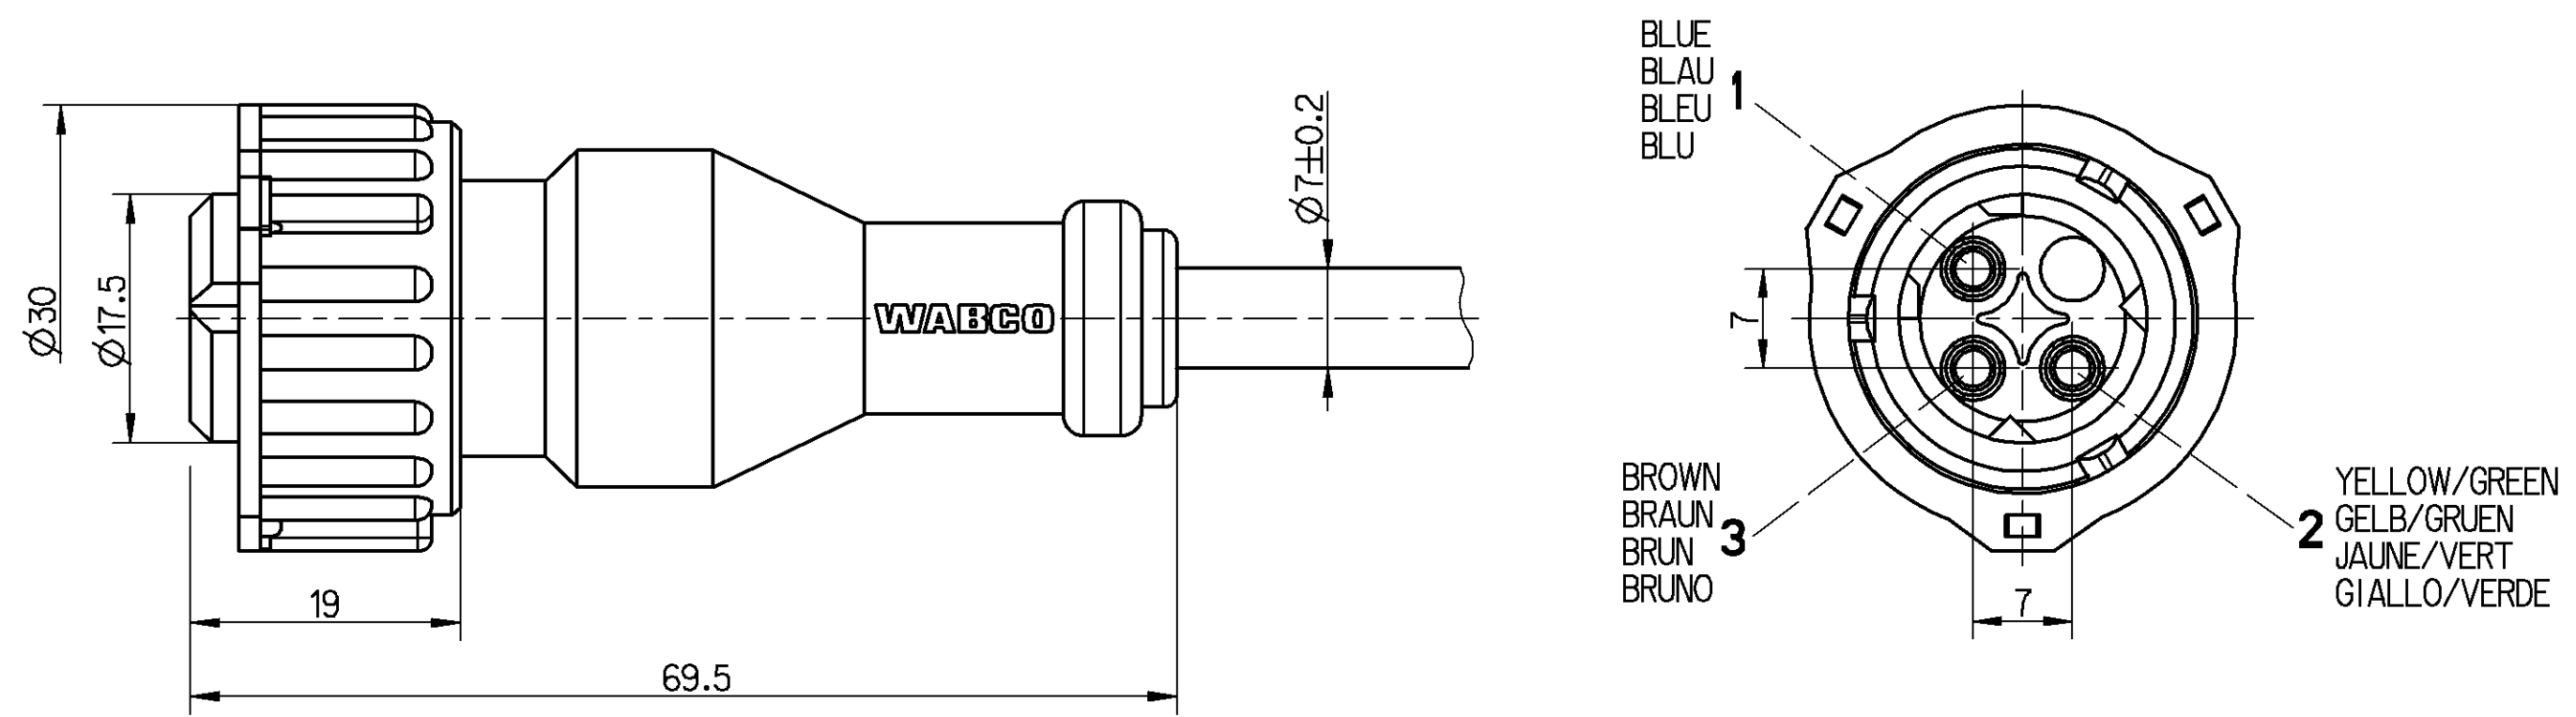

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO TEILE NR. NO DE PIECE CODICE	$L[m]$ 449 423 ☐ ☐ , ☐ 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	$L = \underline{12}m$ 449 423 <u>12</u> 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	$L_{\min} = 0.1m$ $L_{\max} = 20m$
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	$L < 10m \pm 0.050m$ $L > 10m \pm 0.075m$

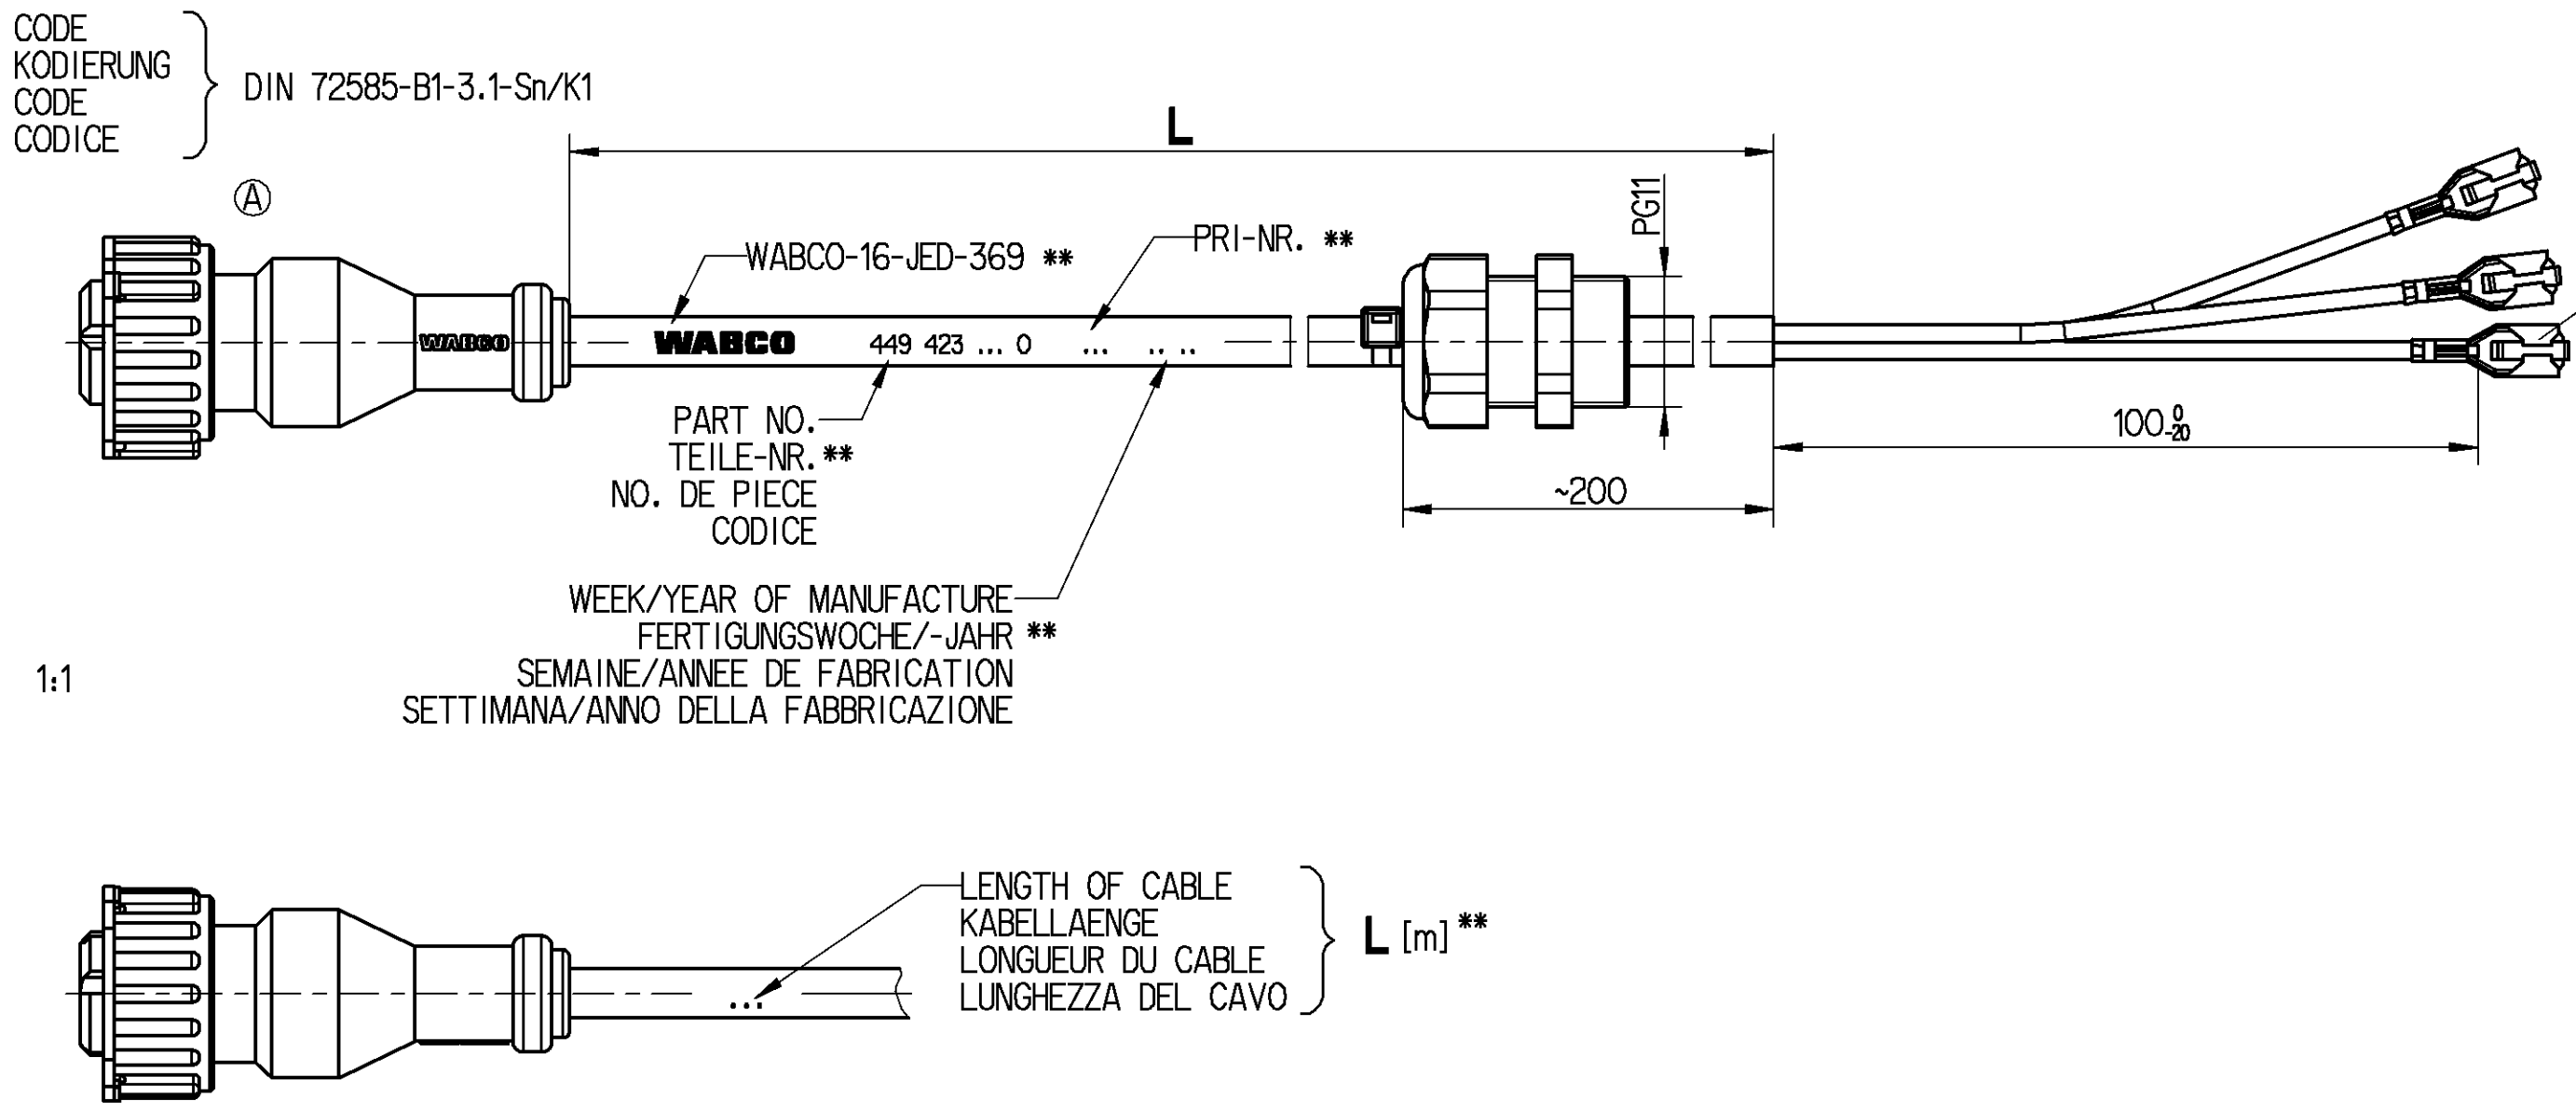


ADAPTER PLUG FOR FLAT CONTACT STECKHUELSEN FUER FLACHSTECKER ALVEOLE POUR LES CONTACT PLATS GUSCIO SPINOTTO PER CONTATTO PIATTO	}	DIN 46244-A 6.3-0.8
** ABRASION RESISTANT PRINT ABRIEFESTER AUFDUCK IMPRESSION RESISTANTE A L' ABRASION IMPRONTA RESISTENTE ALL' ABRASIONE	}	RAL 9001
THREE CORE CABLE LEITUNG DREIADIG CABLE A TROIS CONDUCTEURS CAVO A TRE CONDUTTORI	}	PUR 3x1.5mm ²
THERMAL RANGE OF APPLICATION THERMISCHER ANWENDUNGSBEREICH GAMME D'APPLICATION THERMIQUE CAMPO TERMICO D'APPLICAZIONE	}	-40 °C...+80 °C

TYPE OF PROTECTION (IN CONNECTION WITH PLUG)	}	IP6K7 IP6K9K DIN 40050 T.9
SCHUTZART (IN VERBINDUNG MIT STECKER)		
MODE DE PROTECTION (DANS CONNECTION AVEC FICHE)		
TIPO DI PROTEZIONE (IN RELAZIONE CON SPINA)		

RESISTANT TO	}	AIR, WATER, MINERAL OIL, PETROL, DIESELOIL, SALTSpray
BESTÄNDIG GEGEN		LUFT, WASSER, MINERALÖL, BENZIN, DIESELÖL, SALZSPRÜHNebel
RESISTANT A		AIR, EAU, HUILE MINÉRALE, ESSENCE, GASOIL, BROUILLARD SALIN
RESISTENTE A		ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

* DIN 16901-150

GENERAL SPECIFICATION:				JED-334.0 *				Pro/ENGINEER DRAWING COPYRIGHT				WABCO CABLE WITH SOCKET KABEL MIT GERAETESTECKDOSE CABLE AVEC PRISE DE COURANT CAVO CON PRESA DI CORRENTE							
FURTHER TECHNICAL DATA:								DATE								SIGNATURE			
DOC. CODE:				SHEET: TO				DRAWN								99-05-06 HARNISCHM.			
GENERAL TOLERANCES								CHECKED								99-05-06 HOEFLER			
		RANGE OF NOMINAL DIMENSIONS (± mm)						EXPERT CODE											
CLASS	1)	≤ 50	> 50	≤ 180	> 180	≤ 400	> 400					7 6 0							
FINE		0.5	1.0	1.5	2.0			MASS		SCALE	PRODUCT IDENTIFICATION NO.								
MEDIUM		1.0	2.0	3.0	4.0	±3°		/ KG		2:1 1:1	449 423 000 0								
COARSE		2.0	3.5	5.0	6.5			SIZE		TR1					DOC. CODE		SHEET		
TAPPED HOLES ACC. ISO 4039 / JED-152				068364				1x A				99-05-06							
1) TOLERANCE CLASS APPLIED CROSSMARKED				DCN-NO.				REV.				DATE							
								A 2				141							
																			
												FUNCTION CODE							
												SHAPE CODE							
												PRODUCT TYPE							
												REPLACEMENT FOR							
												1 1							
												449 423 000 0/98-10-13							