
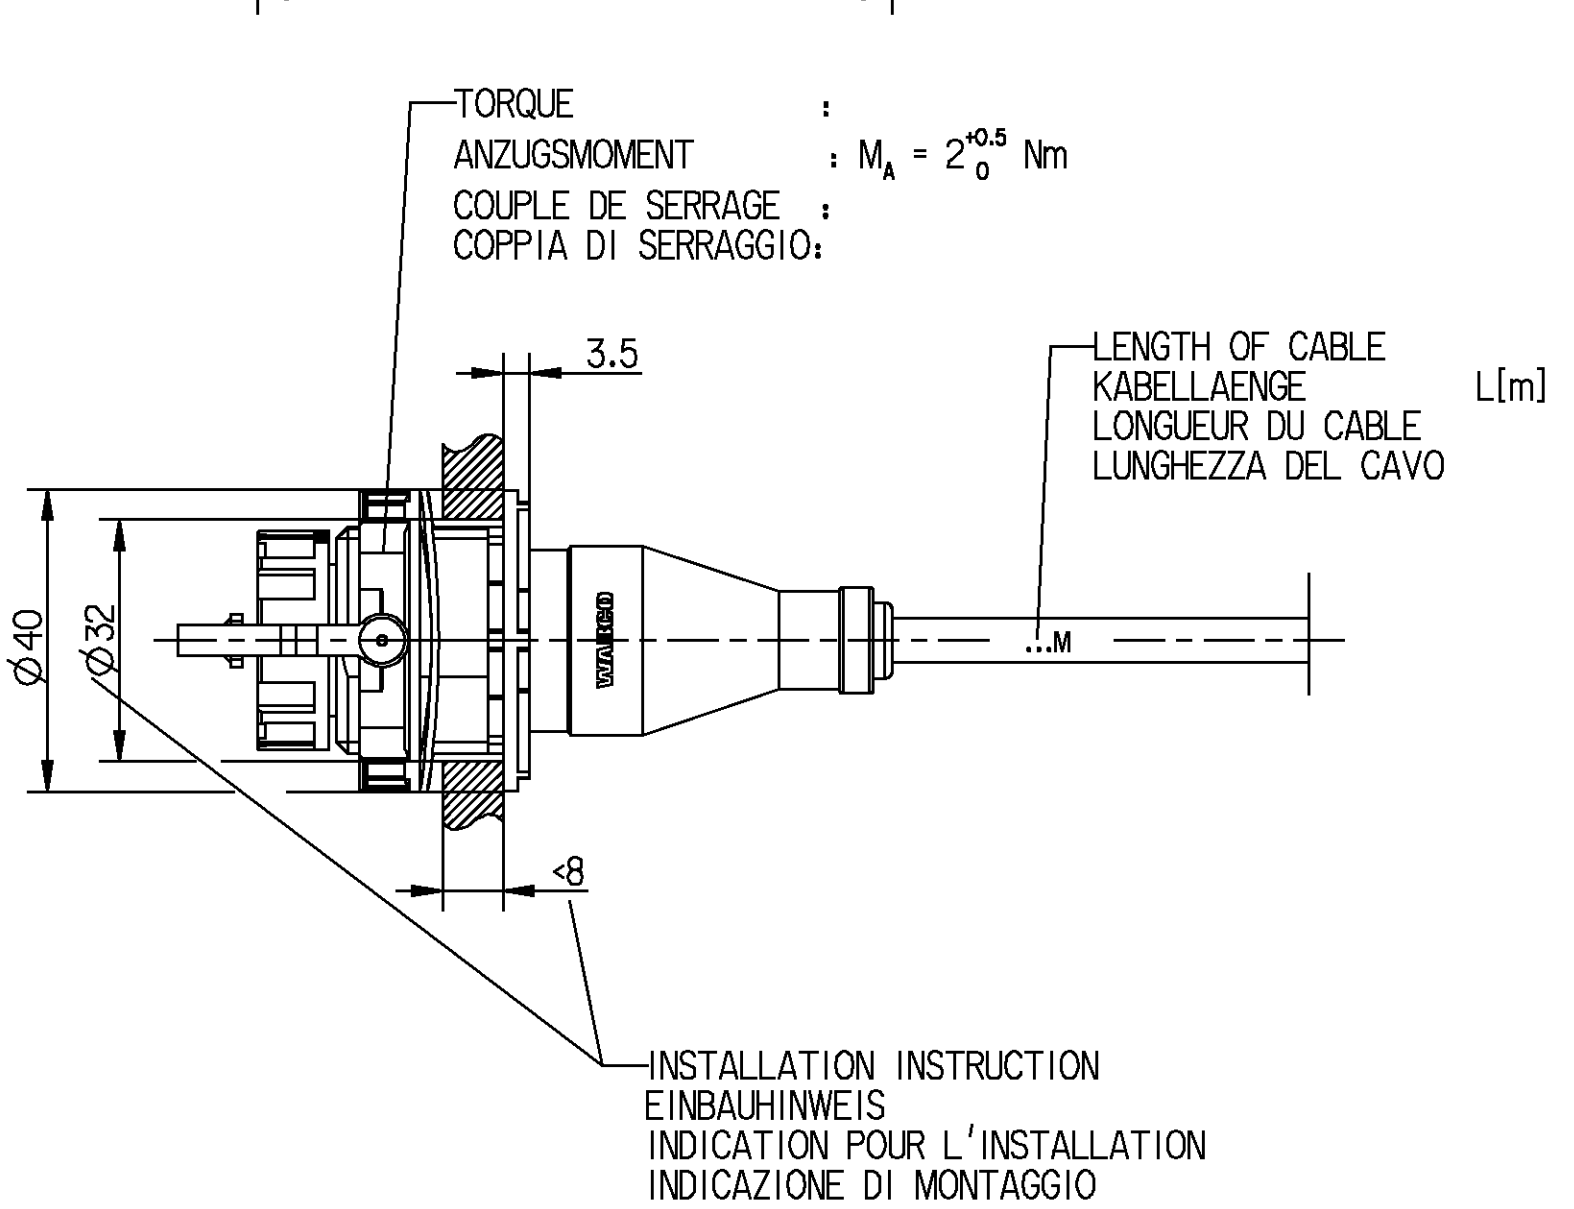
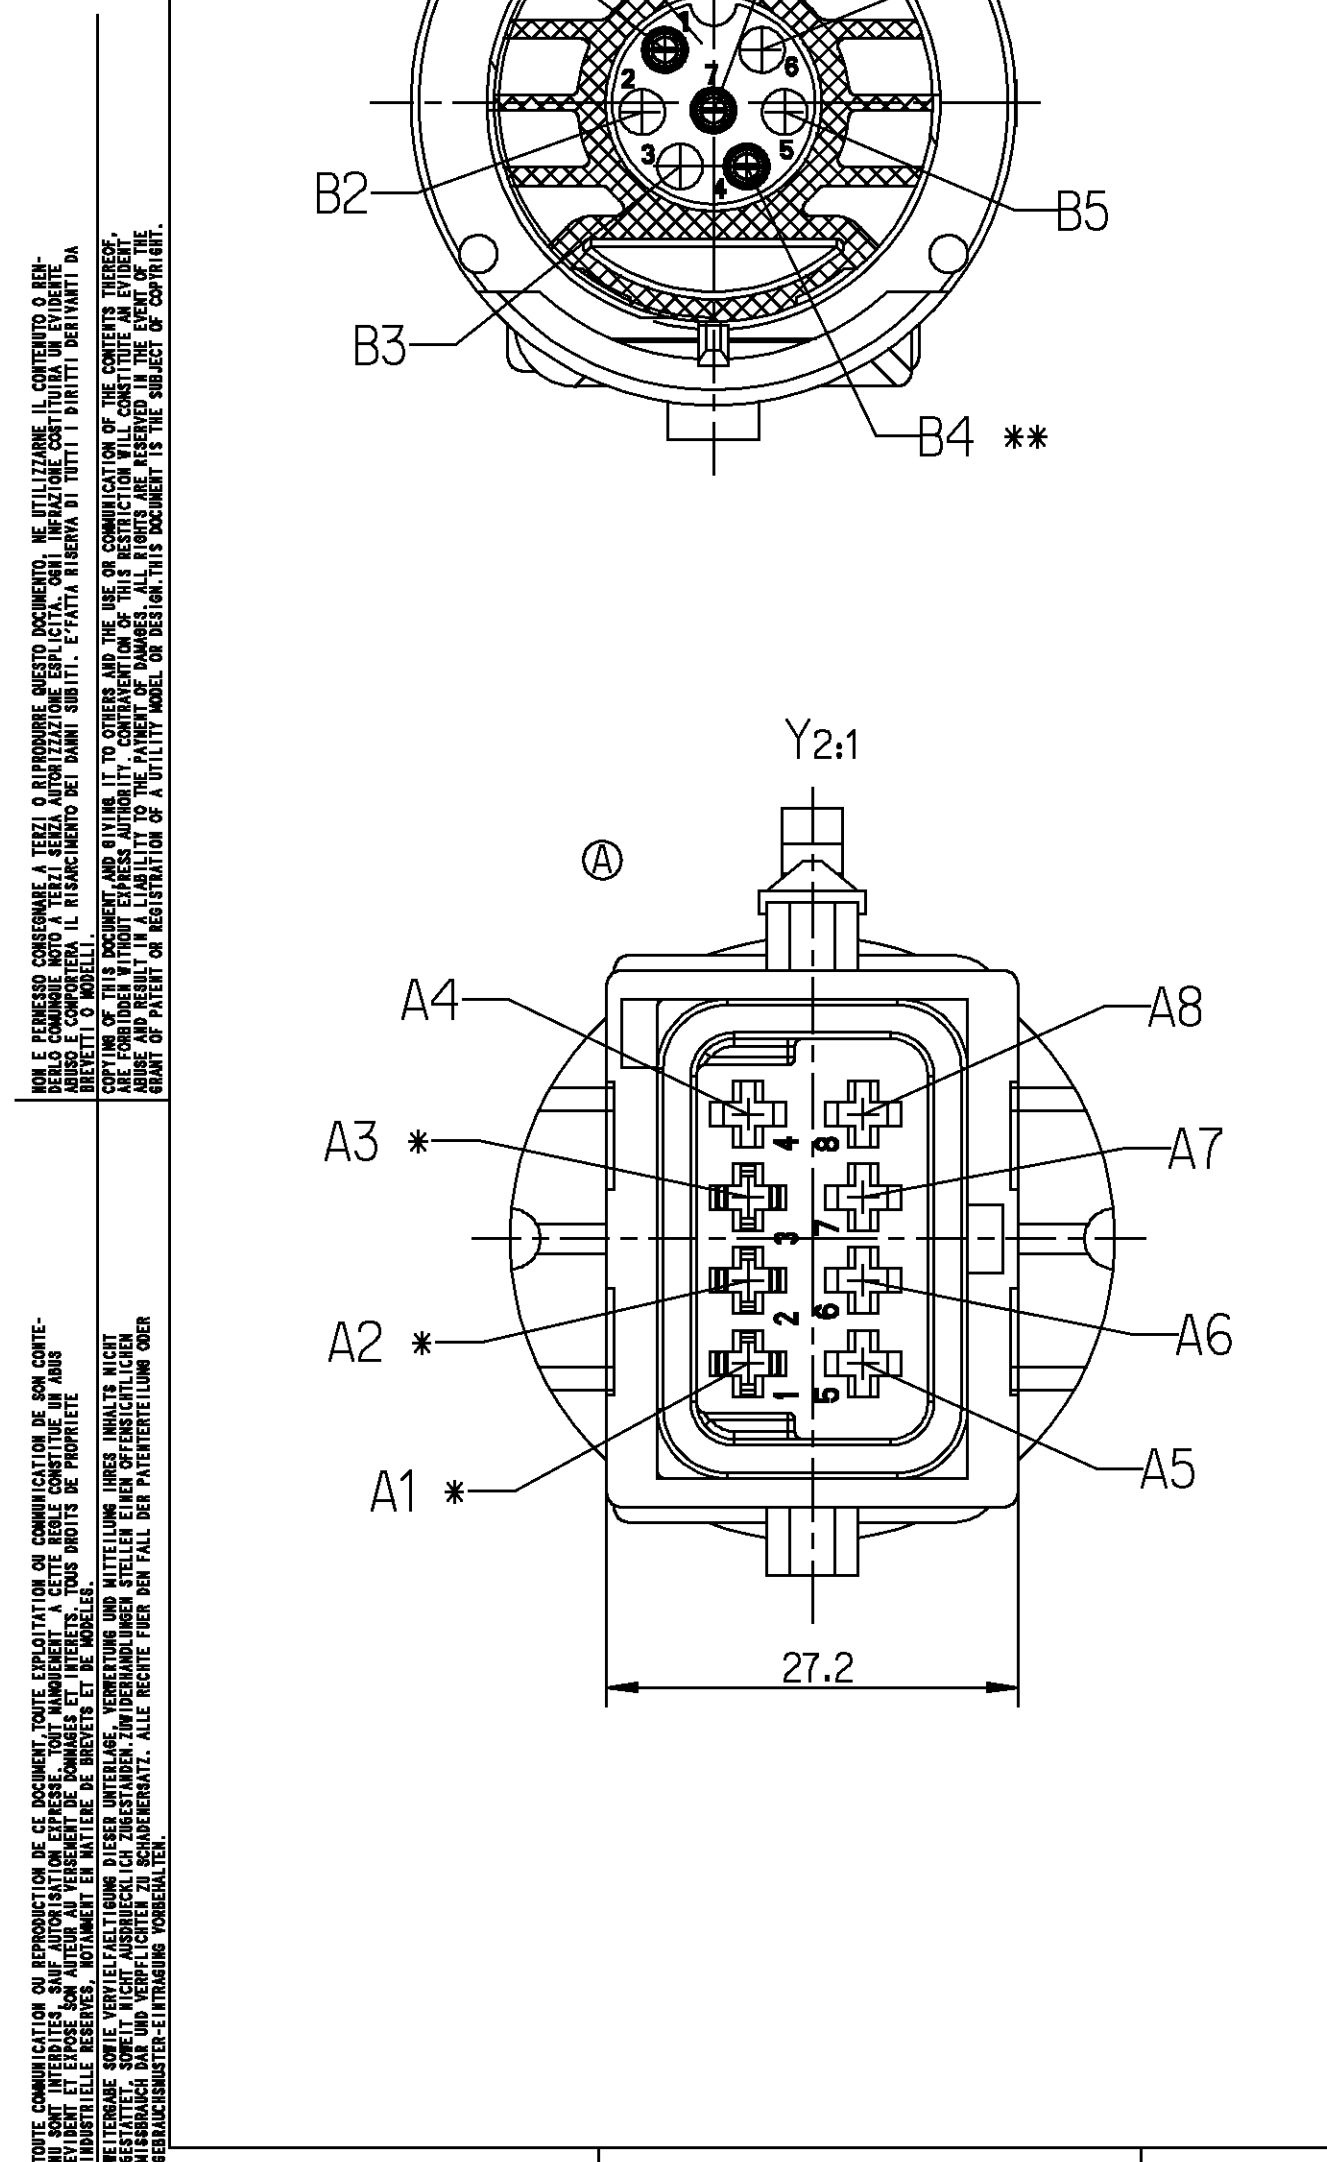


NON E' PERMESSO CONSERVARE A TESSI O RIPRODURRE QUESTO DOCUMENTO, NE UTILIZZARE IL CONTENUTO O RE-
ARREDO E' CONSIDERATO UN VIOLAMENTO DEL DIRITTO DI PROPRIETA' INTELLETTUALE. TUTTI I DIRITTI RISERVATI DA
BREVETTI O MODELLI.
COPYING OF THIS DOCUMENT AND OBTAINING IT TO OTHERS AND THE USE OR COMMUNICATION OF THE CONTENTS THEREOF,
WITHOUT THE WRITTEN PERMISSION OF THE PATENT OFFICE, IS PROHIBITED. ALL RIGHTS ARE RESERVED IN THE EVENT OF THE
ABUSE AND RESULT IN A LIABILITY TO THE PATENT OFFICE. THIS DOCUMENT IS THE SUBJECT OF COPYRIGHT.
TOUTE COMMUNICATION OU REPRODUCTION DE CE DOCUMENT, TOUTE EXPLOITATION OU COMMUNICATION DE SON CON-
TENU, SANS LA PERMISSION ECRITE DU BUREAU DES BREVETS, EST INTERDITE. TOUS DROITS DE PROPRIETE
INTELLECTUELLE RESERVES, NOTAMMENT EN MATIERE DE BREVETS ET DE MODELES.
WEITEREAE SOWIE VERLEIHELTUNG DIESER UNTERLAGE, VERNEMUNG UND MITTEILUNG IHRES INHALTS NICHT
OHNE SCHRIFTLICHE ZULASSUNG DES PATENTAMTES. ALLE RECHTE FÜR DAS PATENTRECHT ODER
GEBRAUCHSMUSTER-ENTWURF VORBEHALTEN.

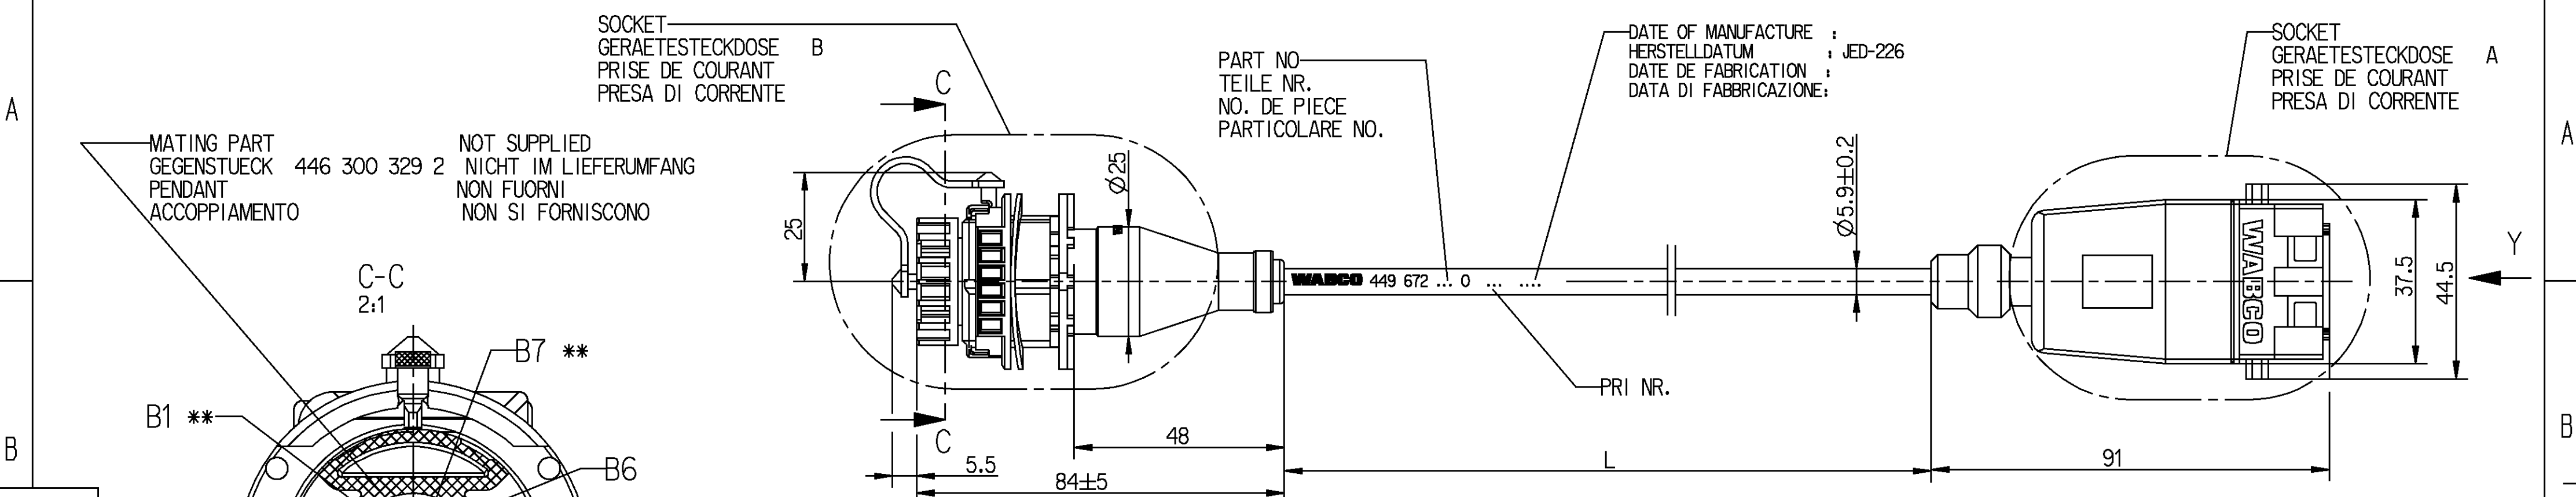

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH: -40 °C....+80 °C
GAMME D'APPLICATION THERMIQUE: ①
CAMPO TERMICO D'APPLICAZIONE: ①

RESISTANT TO : AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALT SPRAY
BESTÄNDIG GEGEN: LUFT, WASSER, MINERALÖL, BENZIN, DIESELÖL, SALZSPRÜHNebel
RESISTANT A : AIR, EAU, HUILE MINÉRALE, ESSENCE, GASOIL, BROUILLARD SALIN
RESISTENTE A : ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG) :
SCHUTZART (IN VERBINDUNG MIT STECKER) : A: IP 6K 9K / IP 67
DEGRE DE PROTECTION (DANS CONNECTION AVEC FICHE): B: IP 6K 9K / IP 67
GRADO DI PROTEZIONE (IN RELAZIONE CON SPINA) :

3-CORE CABLE PUR
LEITUNG 3-ADRIG 3x0.5mm²
CABLE A 3 CONDUCTEURS
CAVO A 3 CONDUTTORI

SURFACE PROTECTION :
OBERFLÄCHENSCHUTZ : * Sn
PROTECTION DE SURFACE: ** Ag
PROTEZIONE SUPERFICI :

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO TEILE NR. NO DE PIECE CODICE	449 672 □ □, □ 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	L = 6_m 449 672 060 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	L _{min} = 0.1m L _{max} = 20m
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	L < 10m ±0.050m L > 10m ±0.075m

GENERAL SPECIFICATION:				JED-334.0						Pro/ENGINEER DRAWING COPYRIGHT		WABCO													
FURTHER TECHNICAL DATA:										DATE						SIGNATURE									
DOC. CODE:		SHEET:		TO						DRAWN		CABLE WITH SOCKET KABEL MIT GERAETESTECKDOSE CABLE AVEC PRISE DE COURANT CAVO CON PRESA DI CORRENTE													
GENERAL TOLERANCES						7-Jul-97		Weber																	
						CHECKED																			
						97-07-15		Hein																	
RANGE OF NOMINAL DIMENSIONS (± mm)						EXPERT CODE				PRODUCT IDENTIFICATION NO.															
						7 5 5																			
CLASS		1)		≤ 50		> 50 ≤ 180		> 180 ≤ 400						> 400		±3°									
FINE				0.5		1.0		1.5		2.0															
MEDIUM				1.0		2.0		3.0		4.0															
COARSE				2.0		3.5		5.0		6.5															
TAPPED HOLES ACC. ISO 4039 / JED-152						062786		2x		97-10-02		449 672 000 0													
1) TOLERANCE CLASS APPLIED CROSSMARKED						DCN-NO.		REV.		DATE															
												A 2		142				FUNCTION CODE		SHAPE CODE		PRODUCT TYPE		REPLACEMENT FOR	
																				I I		884 010 407 0			