<!>	SAFETY CHARACTERISTICS	0
<2>	SIGNIFICANT CHARACTERISTICS	0
<C>	CUSTOMER INTERFACE	0

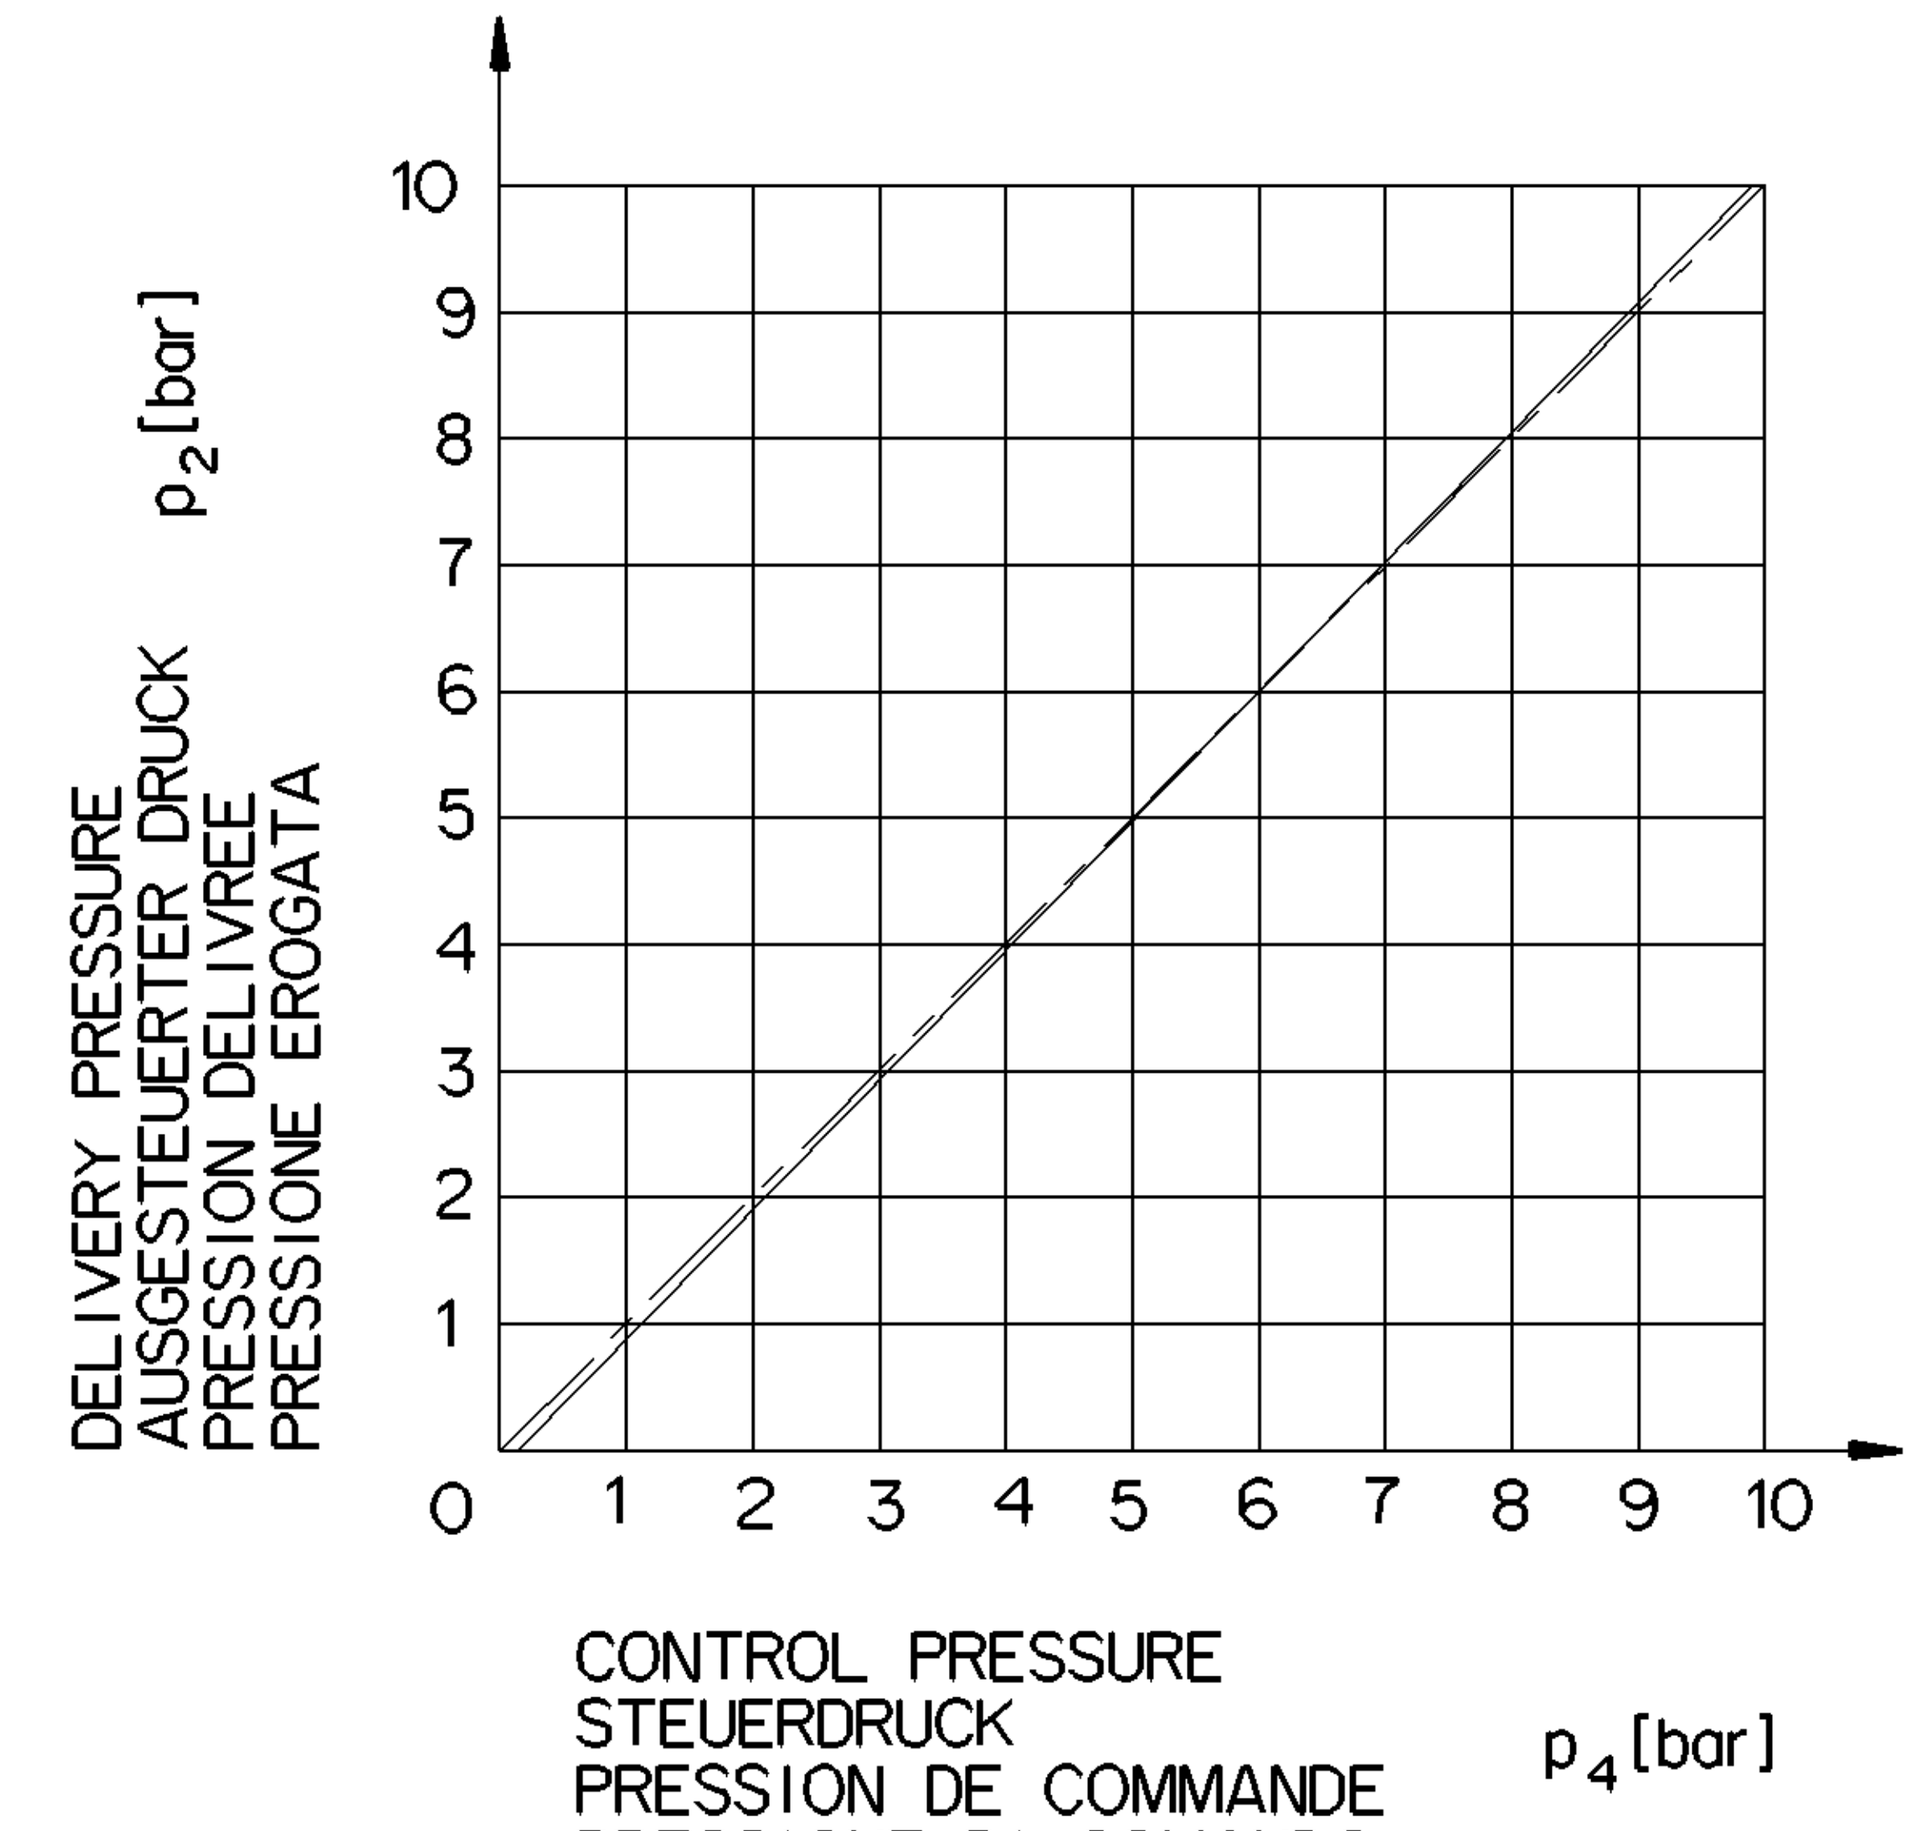

ELECTRICAL CONTROL
ELEKTRISCHER STEUERANSCHLUSS
COMMANDE ELECTRIQUE
COMMANDO ELECTRICO
} DIN 72585-A1-3.1-Sn/K1

THE VALVE CORRESPONDS TO THE REGULATIONS FOR ELECTROMAGNETIC DEVICES ACCORDING TO VDE 0580
DAS GERAET ENTSPRICHT DEN BESTIMMUNGEN FUER ELEKTROMAGNETISCHE GERAETE NACH VDE 0580
LA VALVE CORRESPOND AUX CONDITIONS POUR DES APPAREILS ELECTROMAGNETIQUES SUIVANT VDE 0580
LA VALVOLA CORRISPONDE ALLE CONDIZIONI PER APPARECCHI ELECTROMAGNETICHI SECONDO VDE 0580

MEDIUM MEDIUM FLUIDE FLUIDO	AIR LUFT AIR ARIA
VOLTAGE SPANNUNG VOLTAGE VOLTAGGIO	24V
TYPE OF CURRENT STROMART NATURE DU COURANT NATURA DELLA CORRENTE	DIRECT CURRENT GLEICHSTROM COURANT CONTNU CORRENTE CONTINUA
SERVICE CONDITION BETRIEBSART CONDITION DU SERVICE CONDIZIONE DI SERVISO	DISCONTINUOUS SERVICE AUSSETZBETRIEB SERVICE DISCONTINUE ESERCIZIO DISCONTINUO ED 5%/5min
NOMINAL CURRENT NENNSTROM COURANT NOMINAL CURRENTE NOMINALE	1.65 A
TYPE OF PROTECTION SCHUTZART MODE DE PROTECTION TIPO DI PROTEZIONE	IP66/69K IEC 529
PROTECTION CLASS SCHUTZKLASSE CLASSE DE PROTECTION CLASSE DI PROTEZIONE	III
WORKING PRESSURE BETRIEBSDRUCK PRESSION D'UTILISATION TIPO DI PROTEZIONE	MAX 10 bar
THERMAL RANGE OF APPLICATION THERMISCHER ANWENDUNGSBEREICH GAMME D'APPLICATION THERMIQUE CAMPO DI APPLICAZIONE THERMICA	-40°C....+80°C
SOCKET GERAETESTECKDOSE PRISE DE COURANT PRESA DI CORRENTE	894 101 649 2
ADMISSIBLE INSTALLATION POSITION ZULAESSIGE EINBAULAGE POSITION D'INSTALLATION ADMISE POSIZIONEEDI MONTAGGIO AMMESSA	±15°

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO
} 472 195 031 0

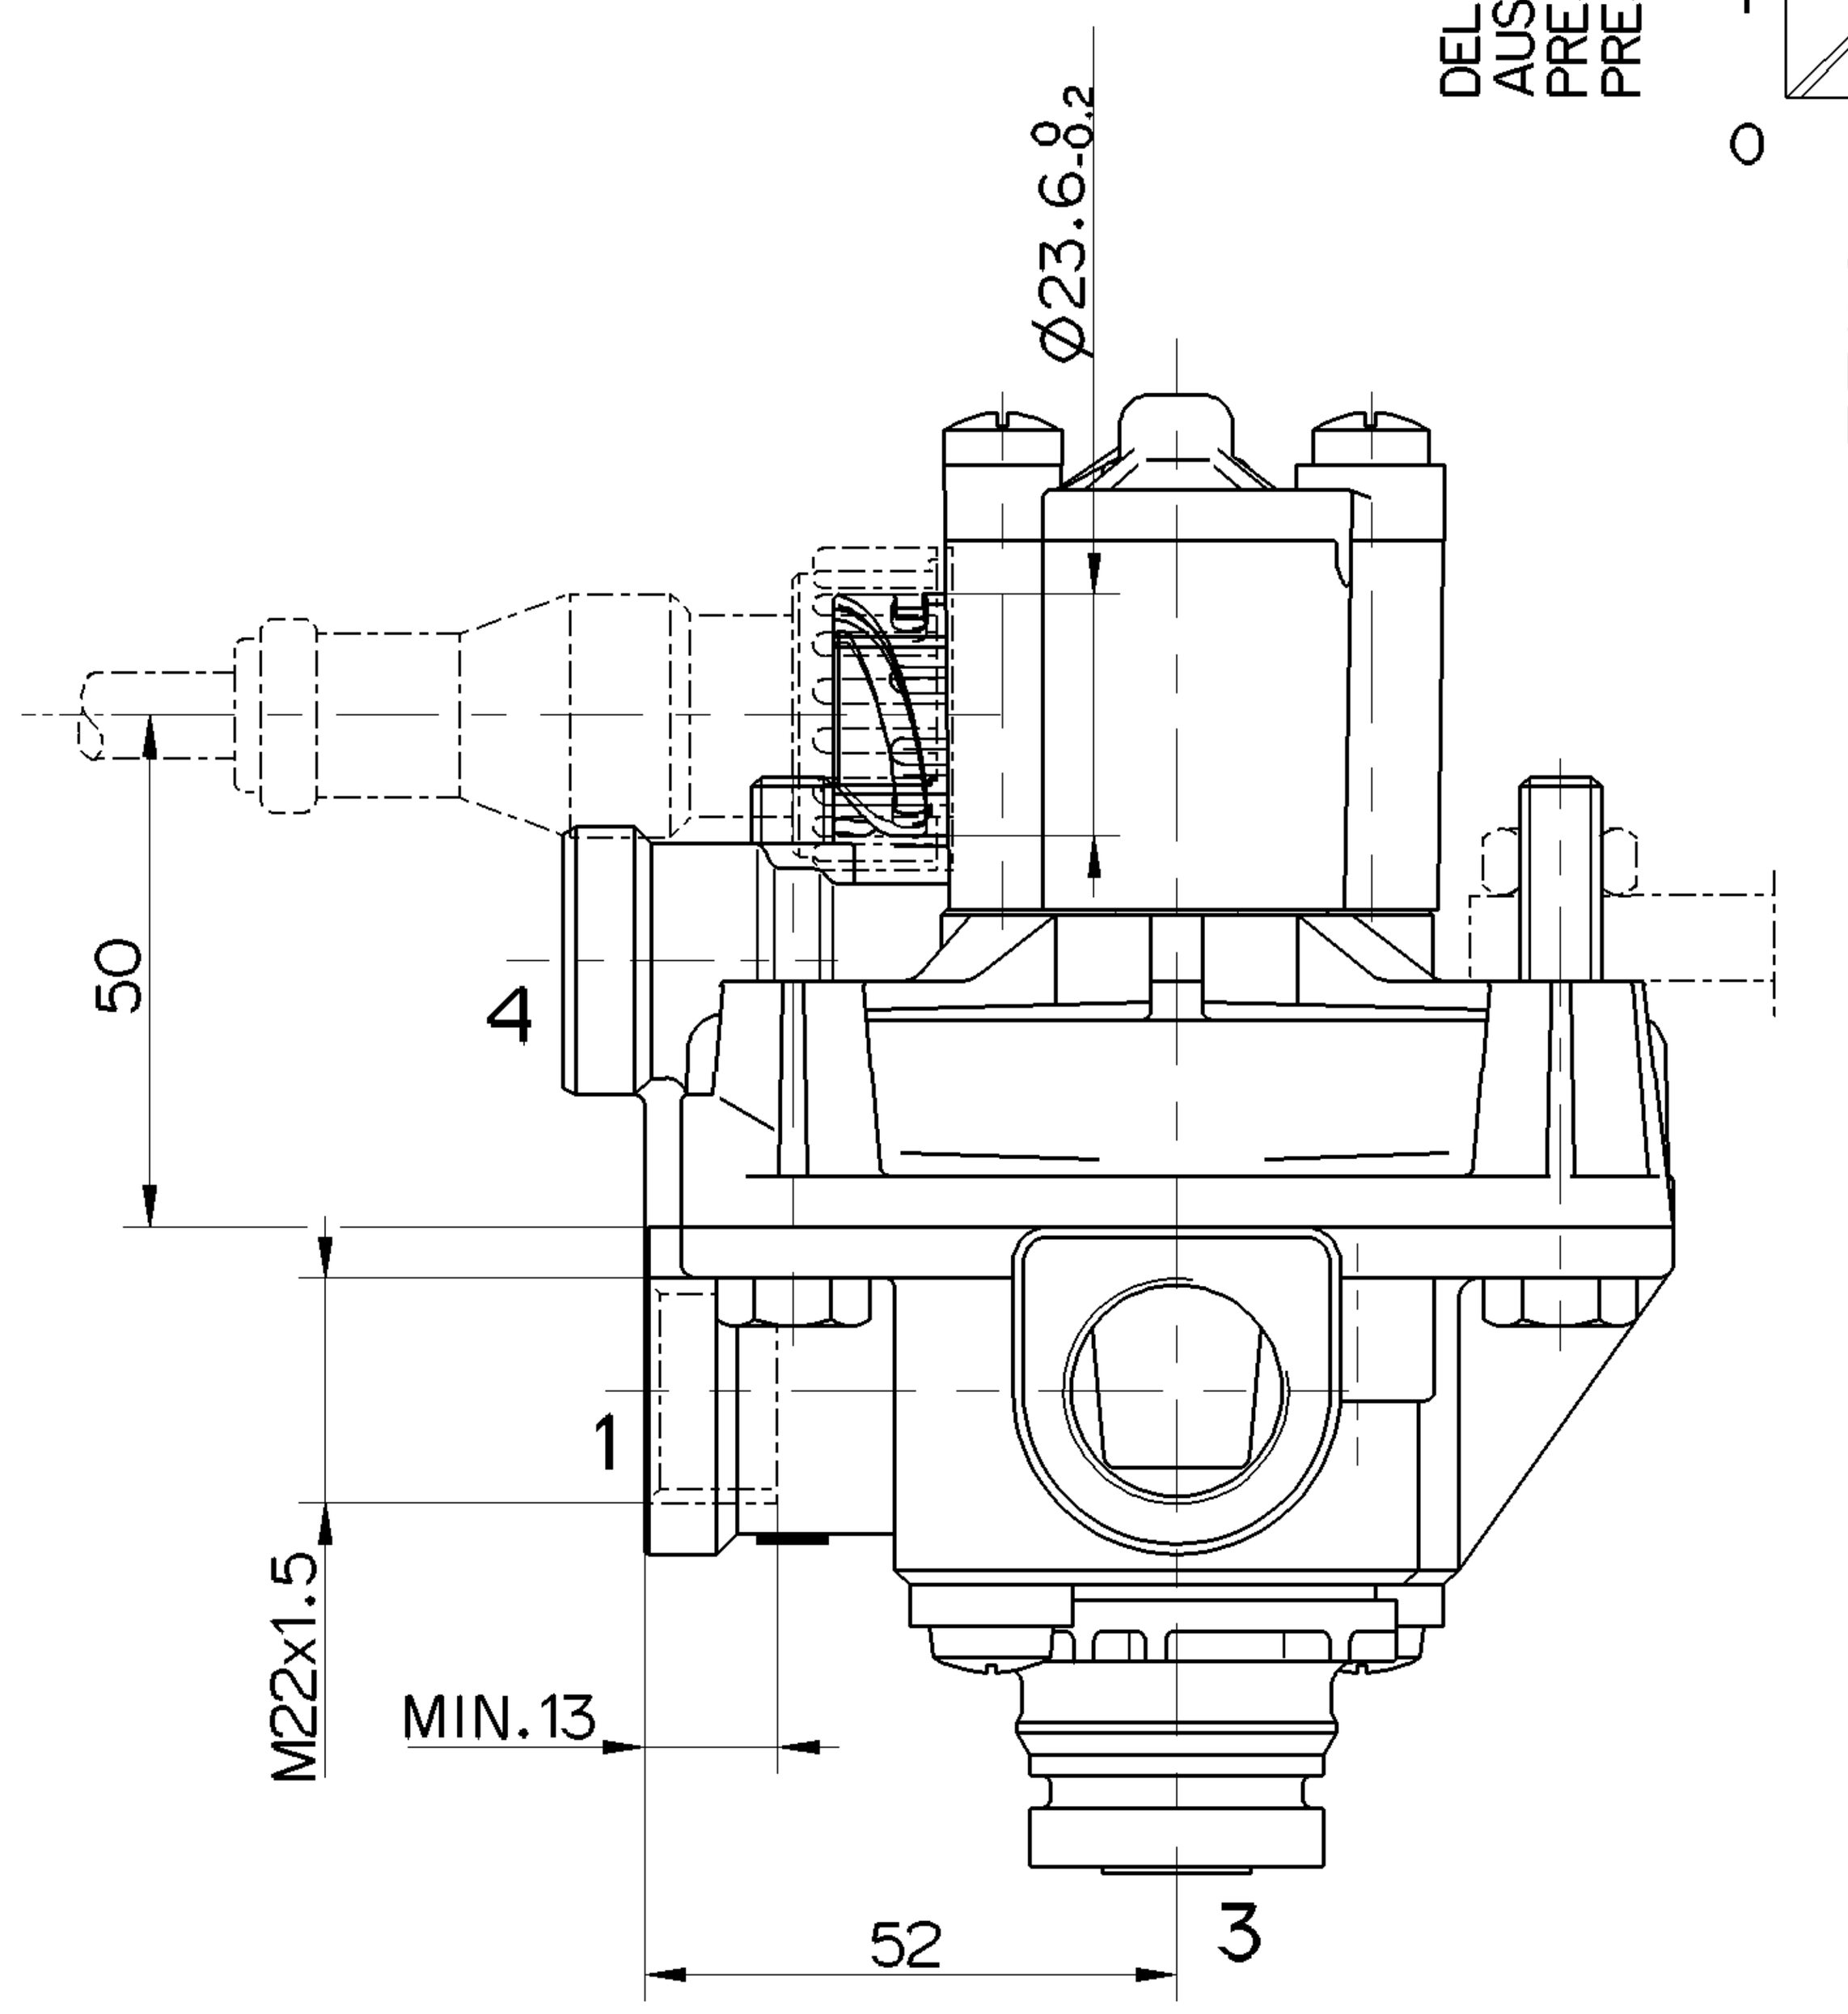

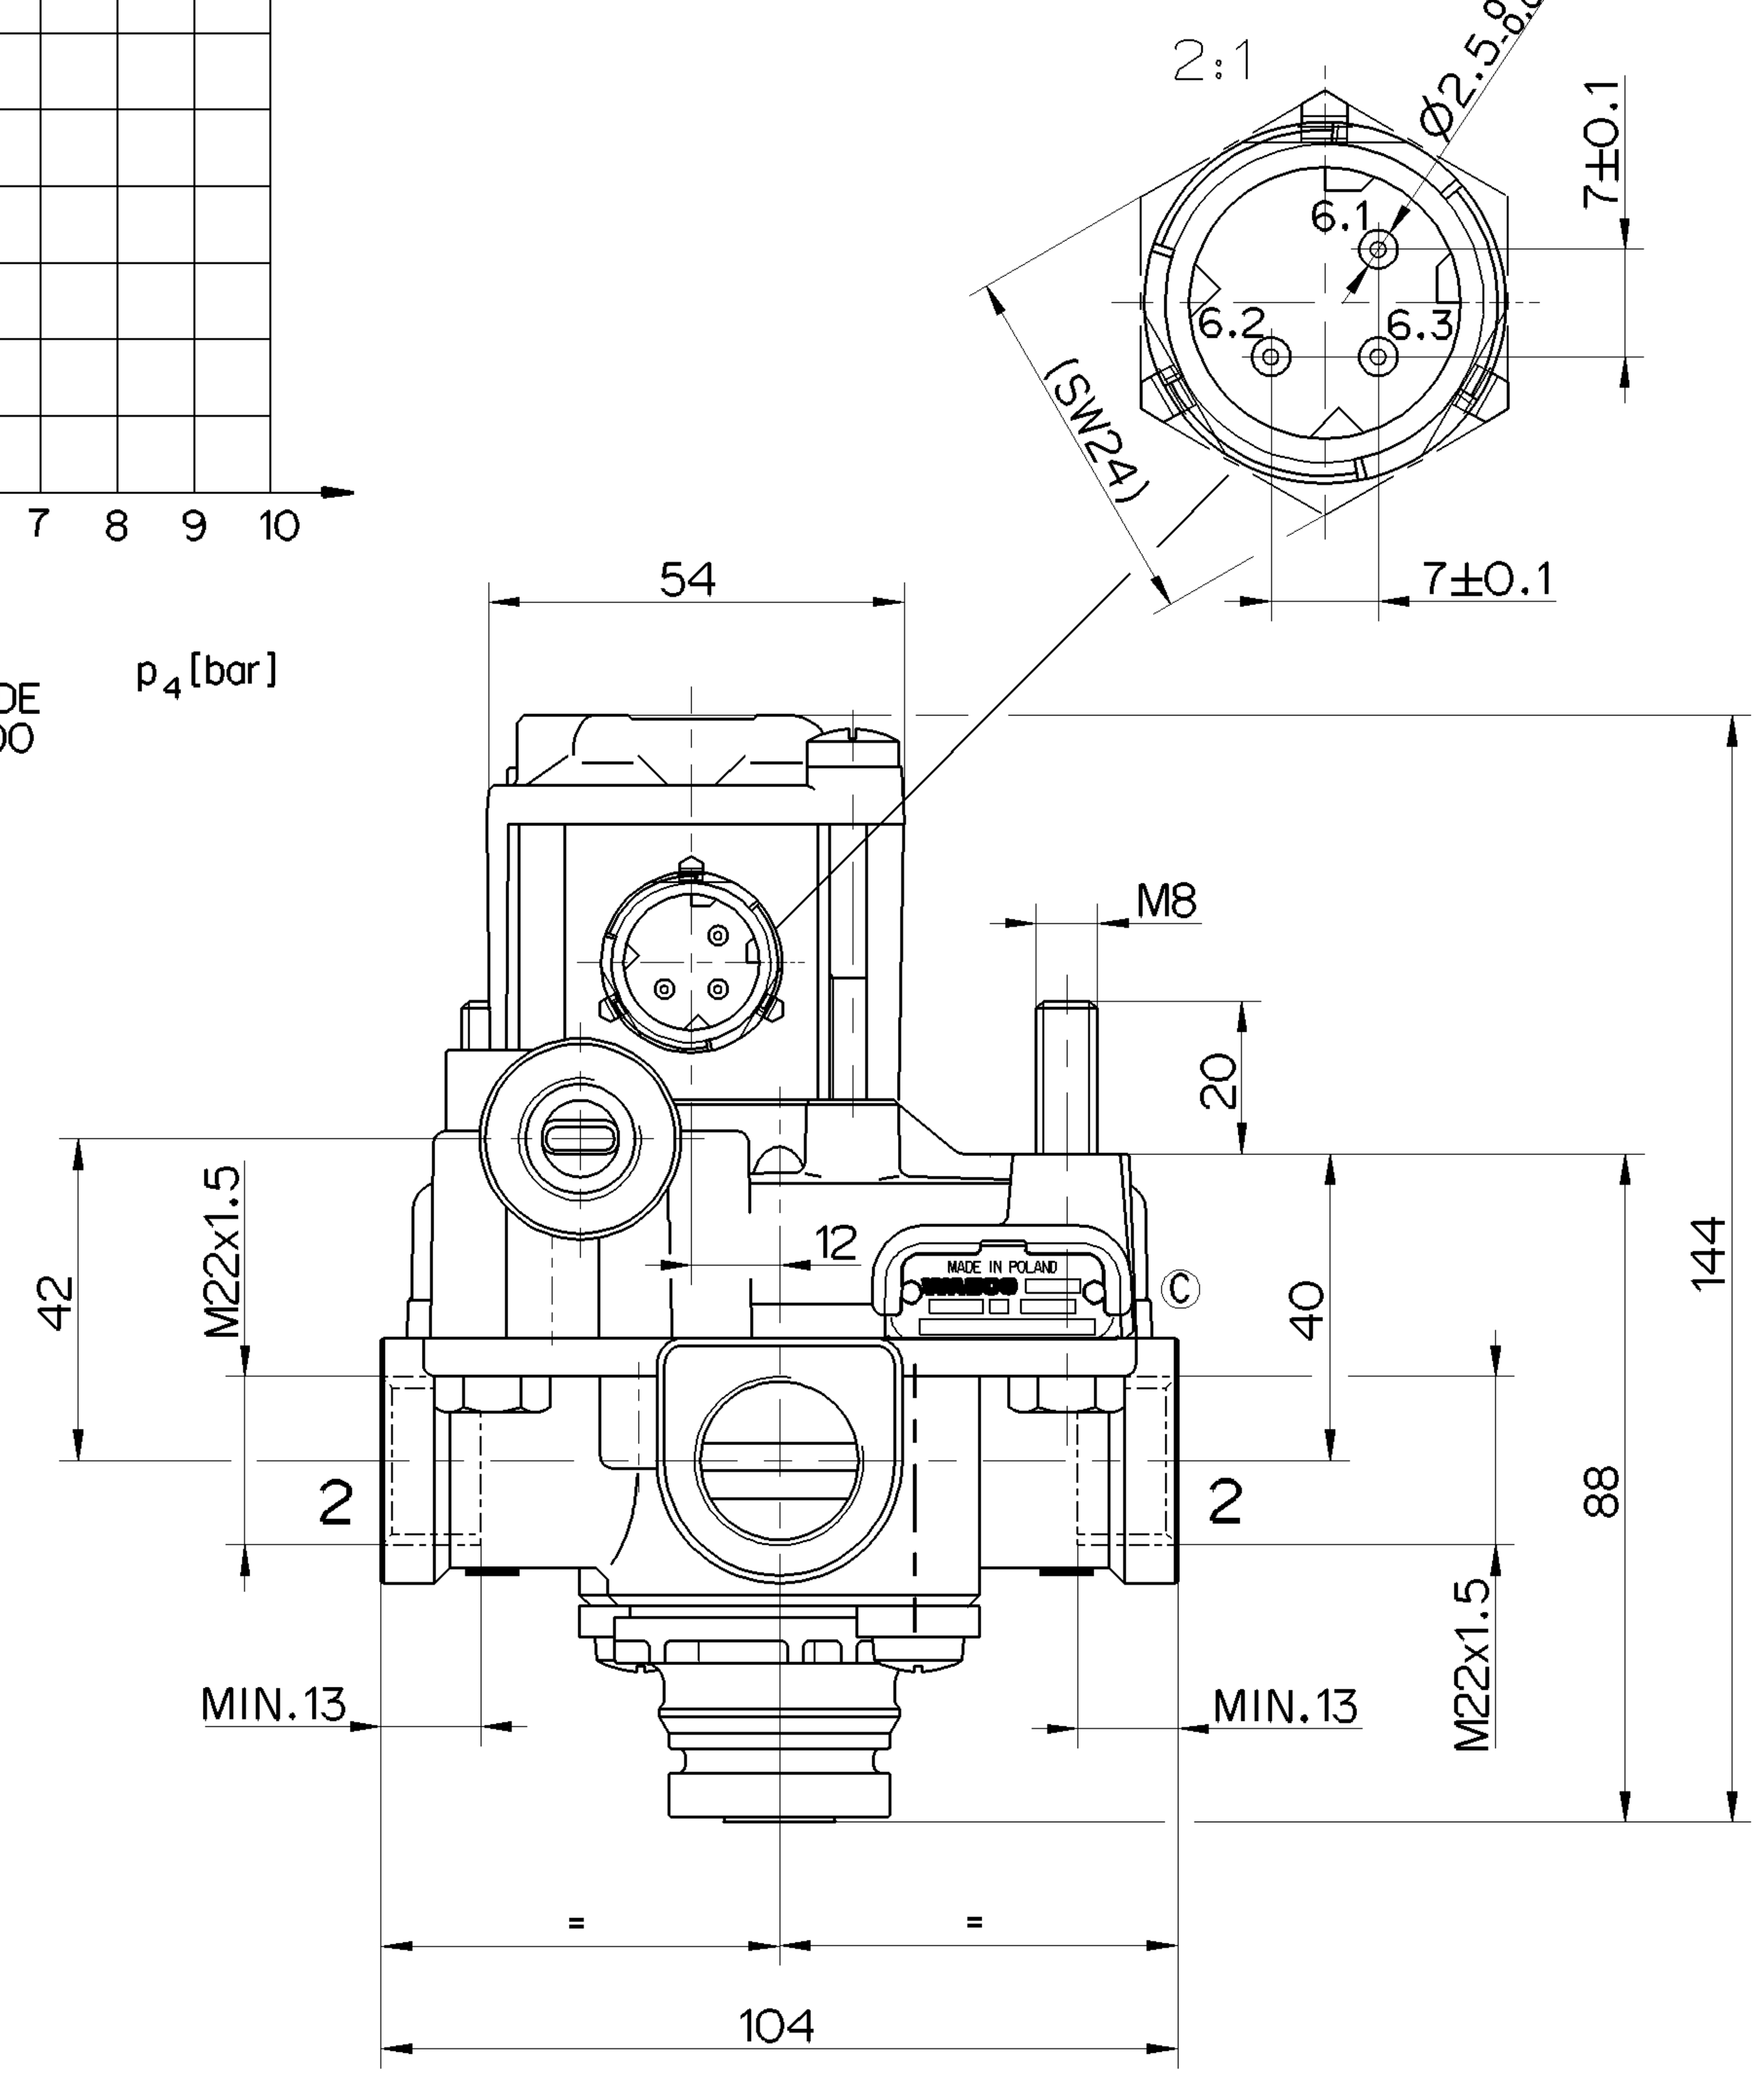

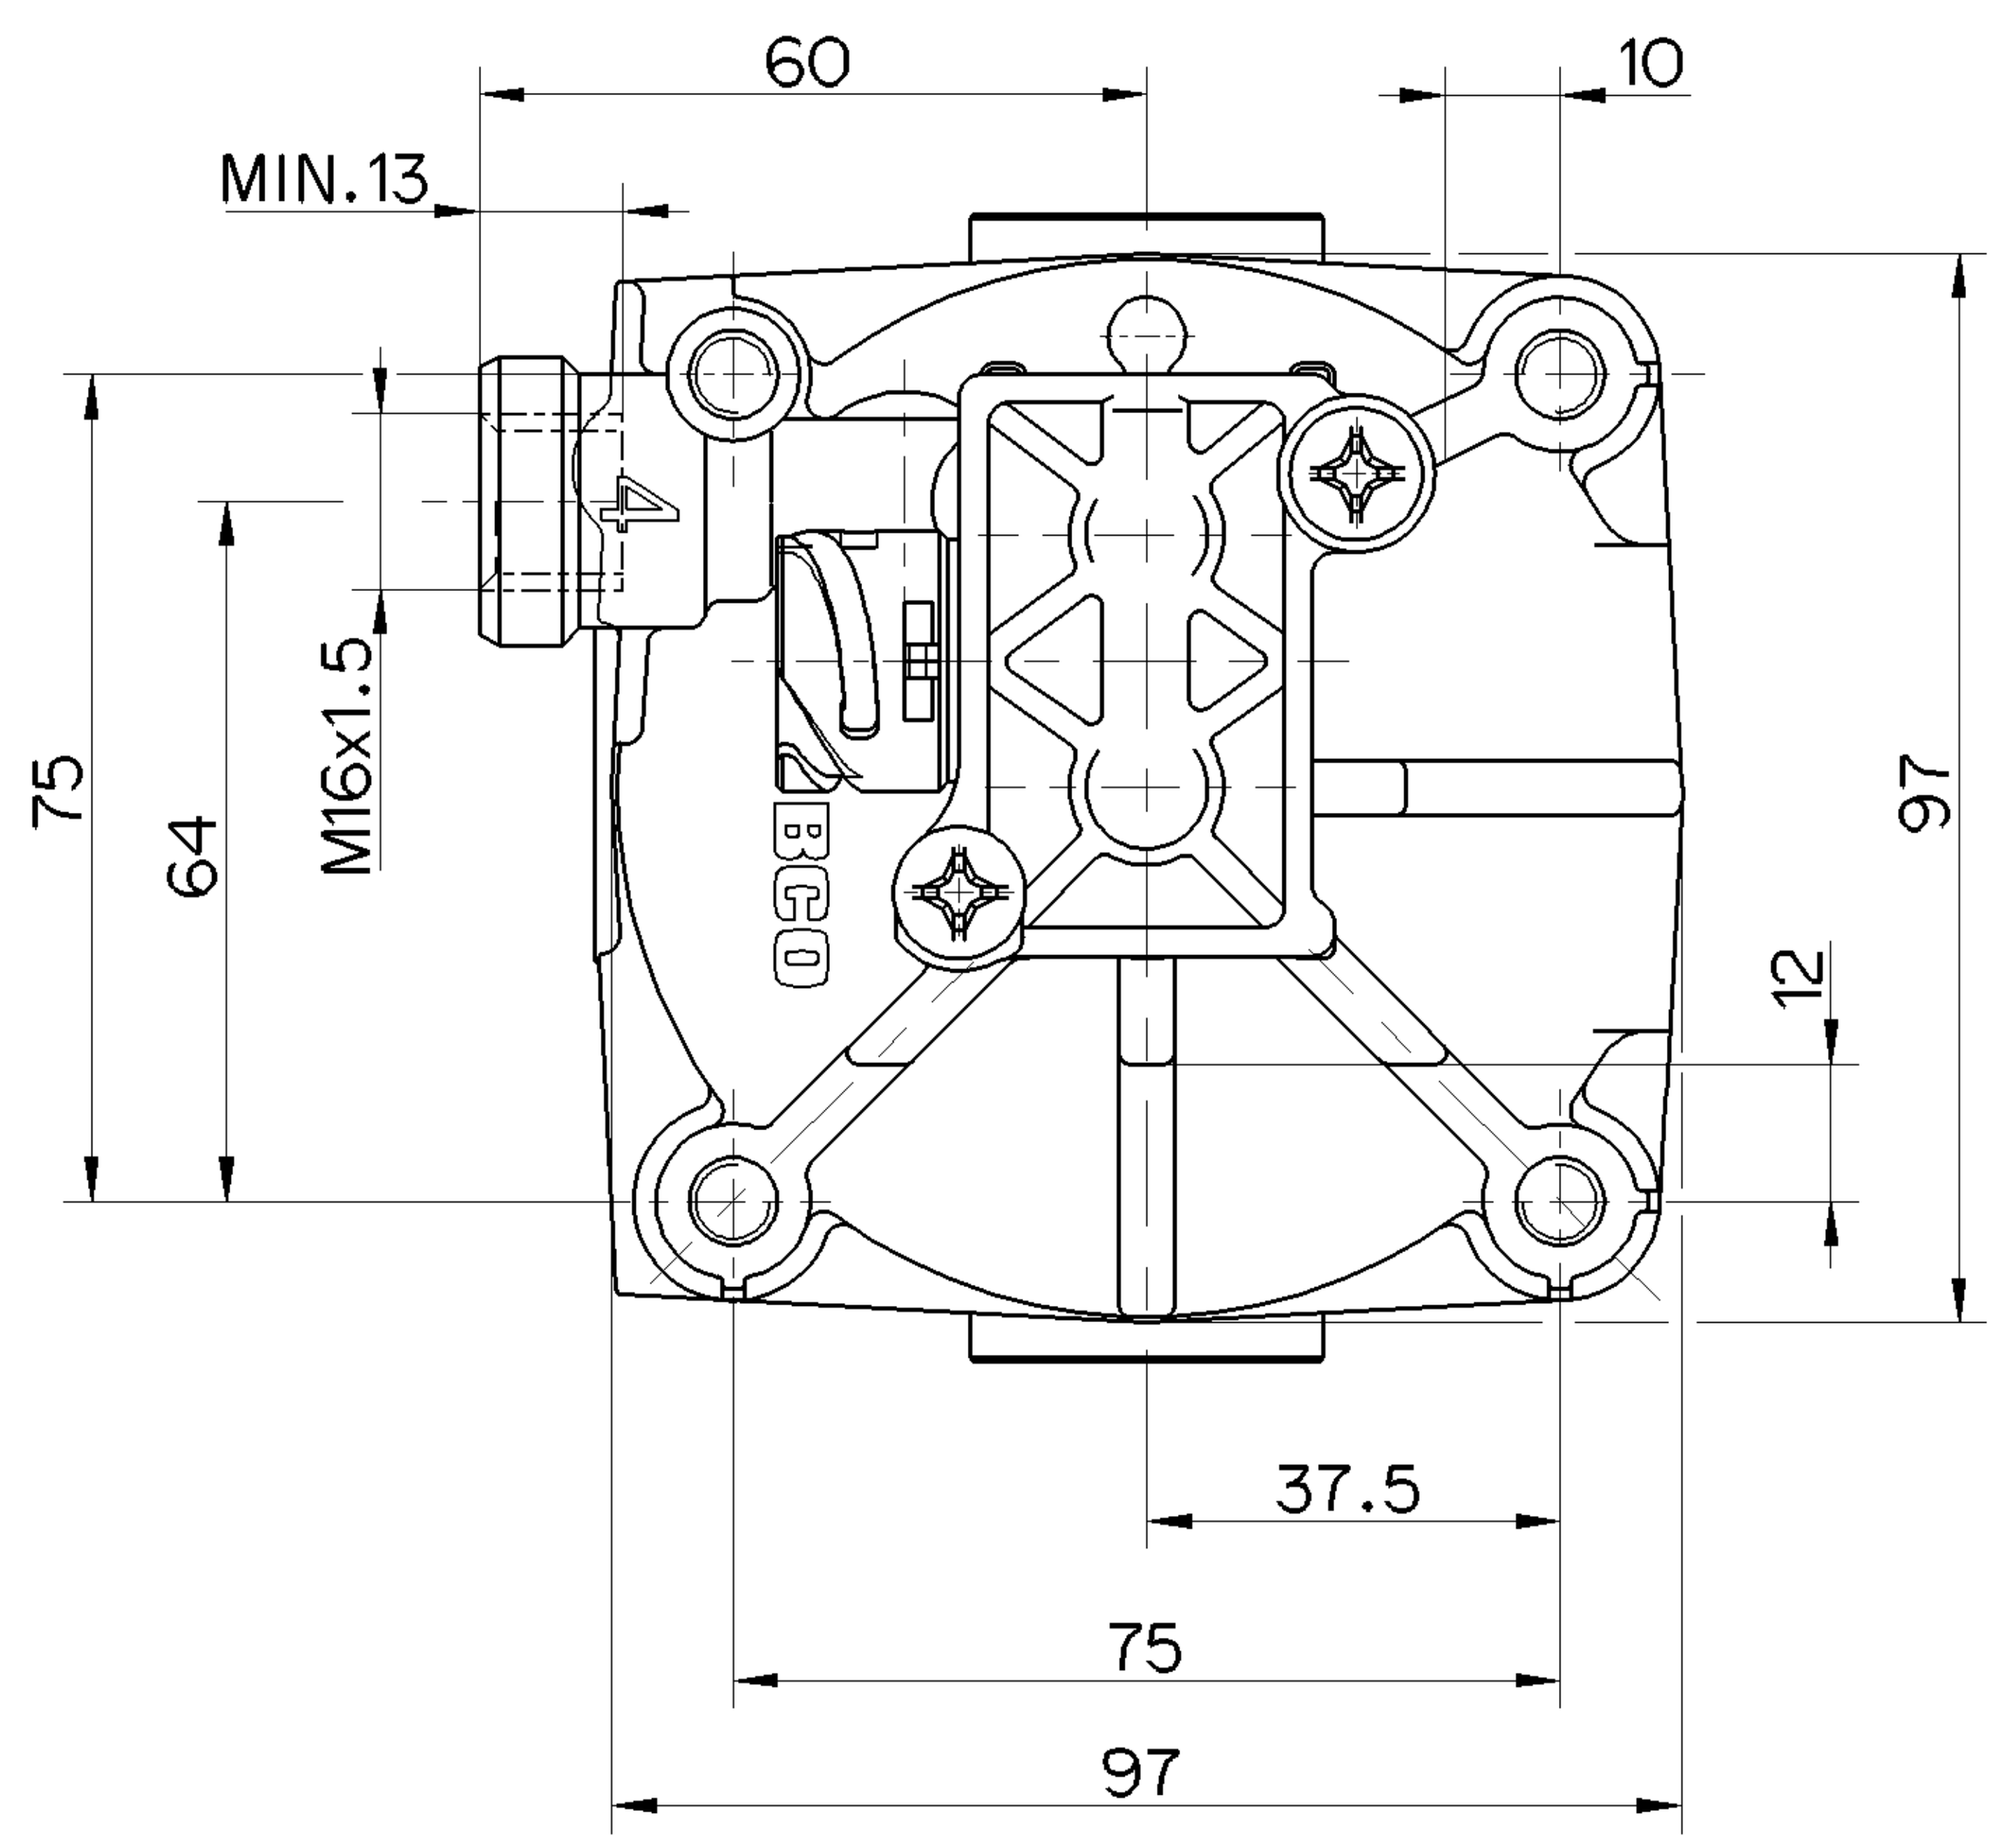

1	SUPPLY OF ENERGY ENERGIEZUFLUSS ALIMENTATION ALIMENTATIONE
2	DELIVERY OF ENERGY ENERGIEABFLUSS UTILISATION MANDATA
3	EXHAUST ENTLUEFTUNG ECHAPPEMENT SCARICO
4	CONTROL STEUERANSCHLUSS COMMANDE COMMANDO
6.1 **6.2** **6.3**	ELECTRICAL CONTROL (MAGNET) ELEKTRISCHER STEUERANSCHLUSS (MAGNET) COMMANDE ELECTRIQUE (AIMANT) COMMANDO ELECTRICO (MAGNETE)

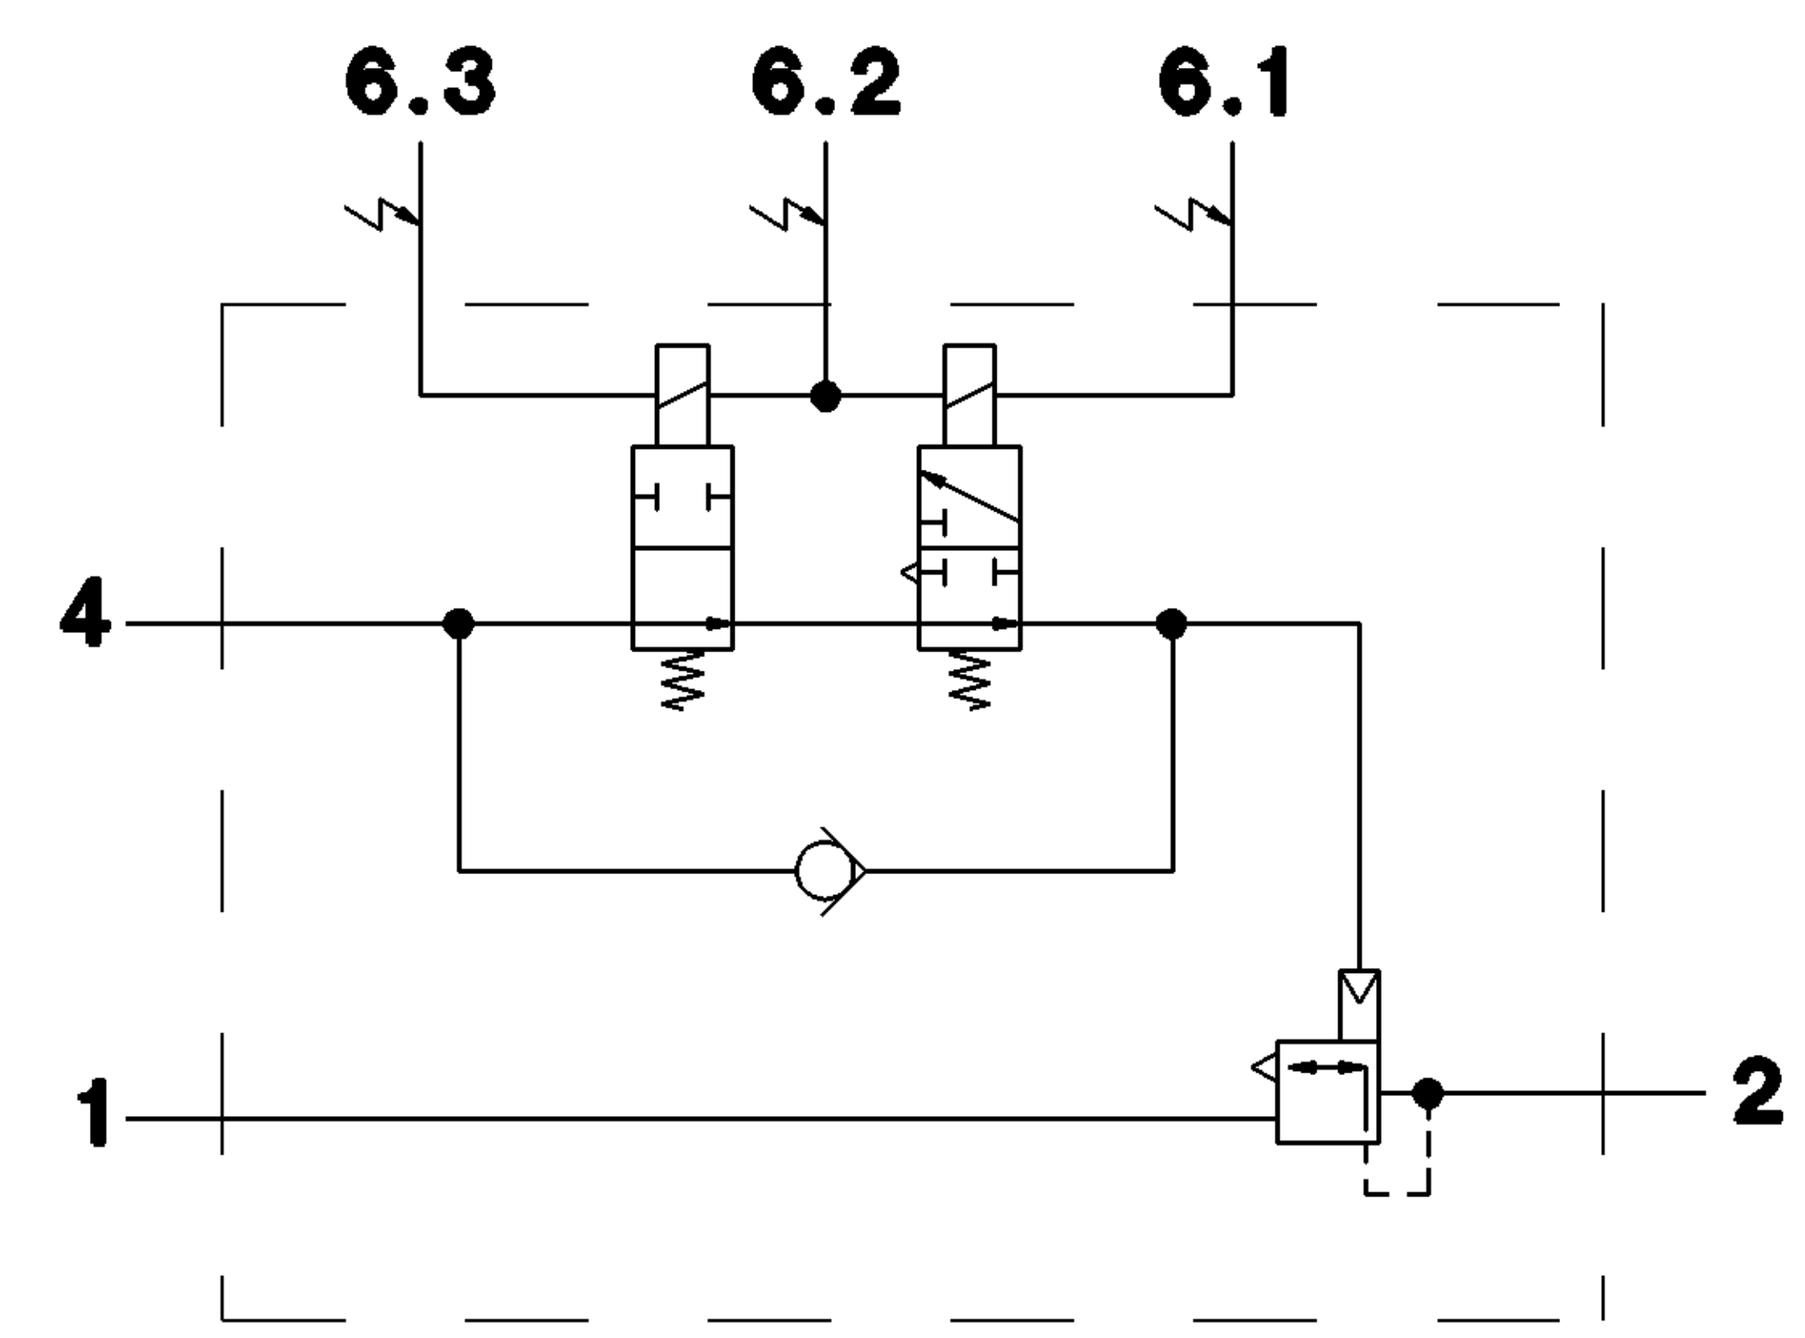

General Specification: JED-334-0 , Size ISO 14405 LP						
Further Technical Data:						
Doc. Code:		Sheet: To				
General Tolerances JED-261						
Class 1)		Range of Nominal Dimensions (± mm) ≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	
Fine		0.5	1.0	1.5	2.0	
Medium	X	1.0	2.0	3.0	4.0	±3°
Coarse		2.0	3.5	5.0	6.5	
Tapped Holes acc. JED-152						
1) Tolerance Class Applied Crossmarked						

Copyright WABCO®

Date	Signature
Drawn	
2019-12-13	Malras
Checked	
2019-12-18	Kaufmann
Expert	
	Kaufmann

WABCO

ABS-RELAY VALVE
ABS-RELAISVENTIL
ABS-VALVE RELAIS
ABS-VALVOLA RELE

Mass	Scale	Material No.	Date of first issue: 1996-05-23		
0.89 KG	1:1 2:1	472 195 031 0	Doc.Code 005	Language ML	Sheet 1/1
Size A 1	CAD System CREO	ECN-No. 161717	Revision 3 x C	Techn. Resp. 6360	Replacement for

100mm