
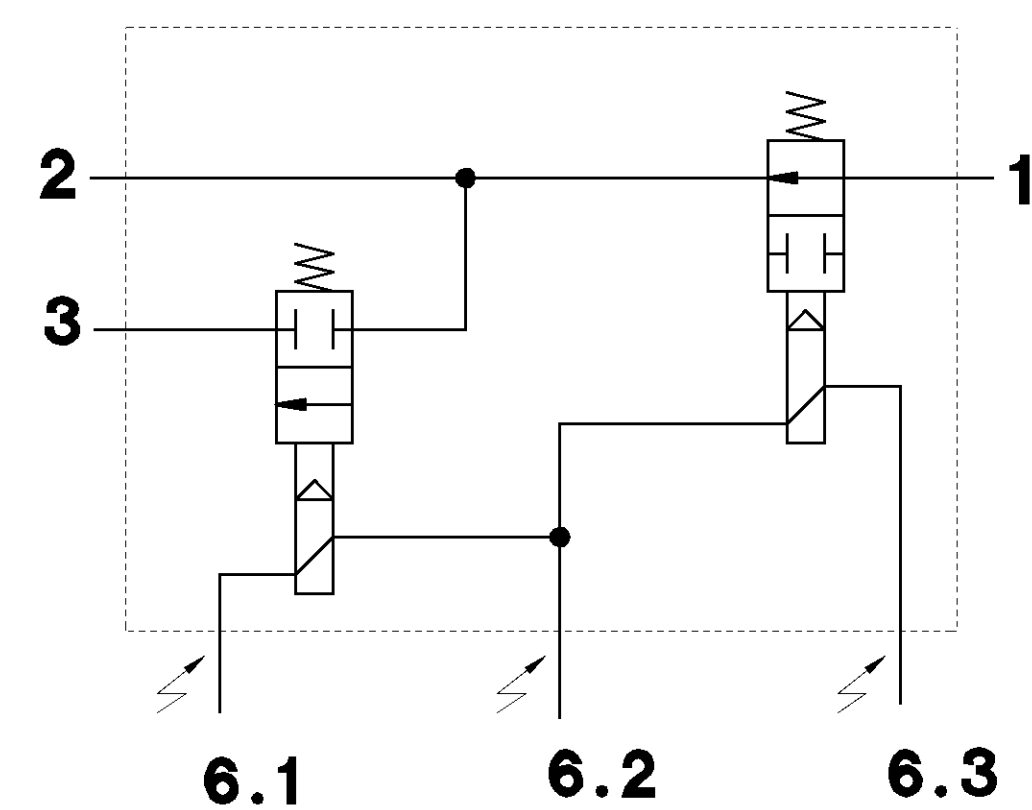


* ADMISSIBLE INSTALLATION POSITION
ZULAESSIGE EINBAULAGE
POSITION D'INSTALLATION ADMISE
POSIZIONE DI MONTAGGIO AMMESSA } ±30°

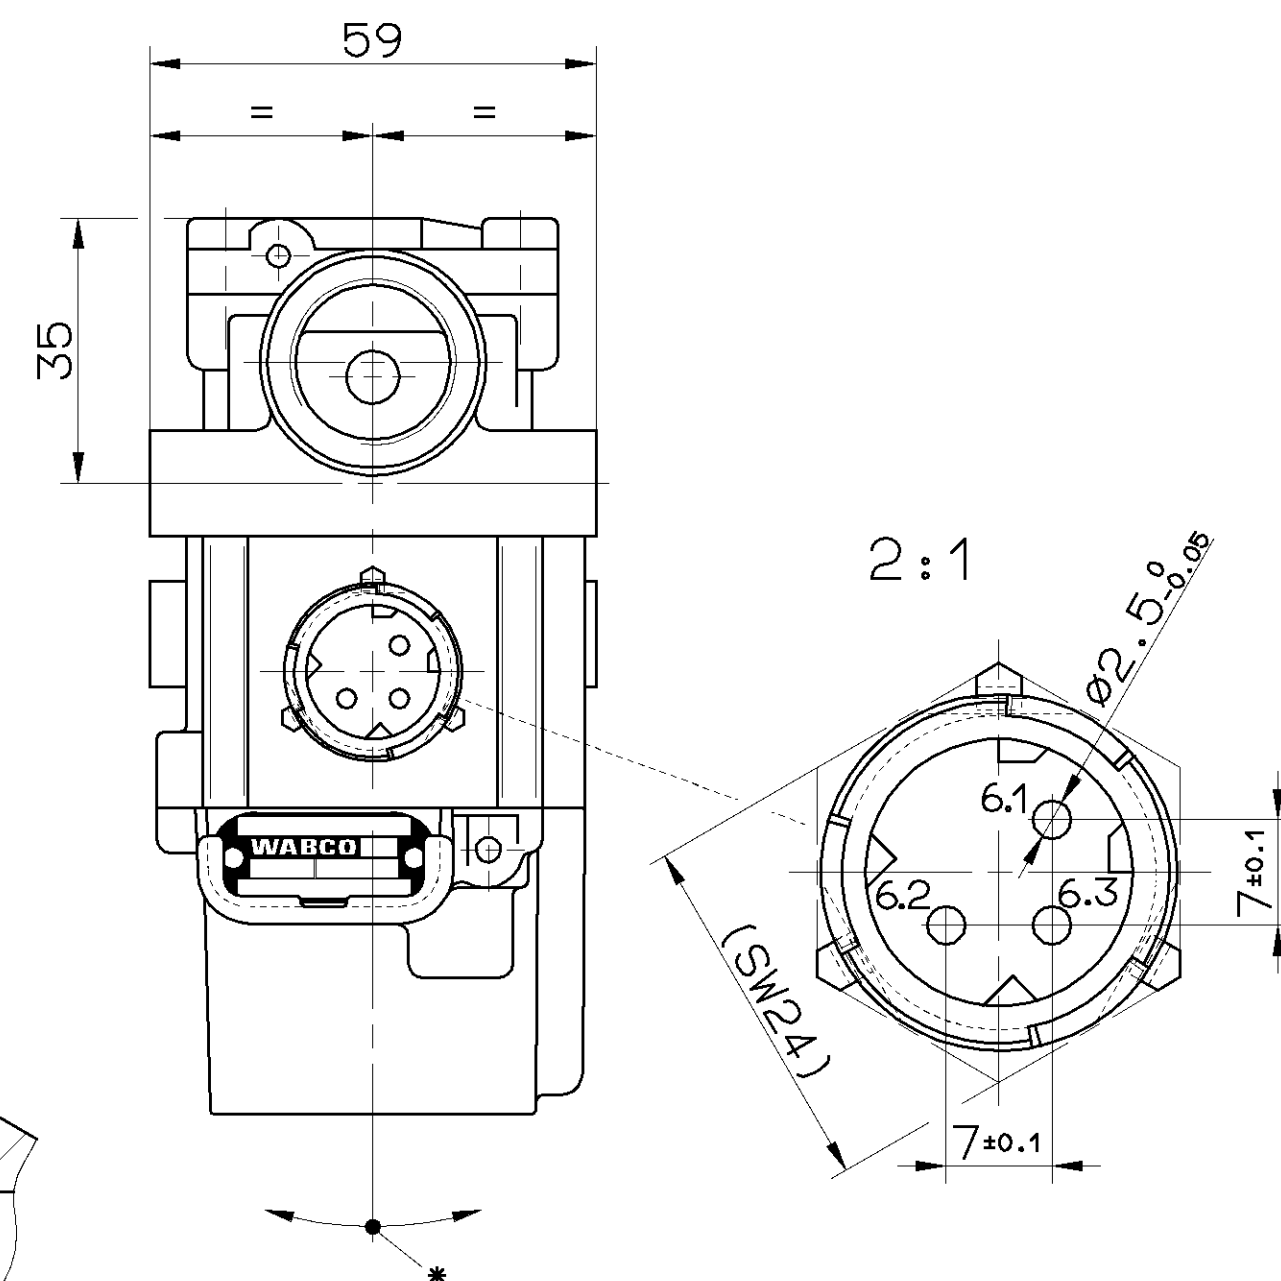

3 EXHAUST ENTLUEFTUNG ECHAPPEMENT SCARICO

ELECTRICAL CONTROL (SOLENOID)
ELEKTRISCHER STEUERANSCHLUSS (MAGNET)
COMMANDE ELECTRIQUE (AIMANT)
COMMANDO ELETTRICO (MAGNETE)

6.1 EXHAUST SOLENOID
AUSLASSMAGNET
AIMANT D'ÉCHAPPEMENT
MAGNETE DI SCARICO

6.2 GROUND
MASSE
MASSE
MASSA

6.3 INLET SOLENOID EINLASSMAGNET AIMANT D'ADMISSION MAGNETE D'IMMISSIONE

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUIT SPECIFICATION
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

472 195 052 0
(CODE 435)

GENERAL SPECIFICATION: JED-334				CADD-DRIVING COPYRIGHT		DATE		SIGNATURE		WABCO	
FURTHER TECHNICAL DATA:				DRAWN:		57-06-06		HARNISCHM		SOLENOID MODULATOR VALVE	
DOC. CODE:		SHEET: TO		CHECKED:		57-06-06		HOEFLE		MAGNETREGELVENTIL	
GENERAL TOLERANCES				STANDARDIZATION:						ELECTROVALVE MODERABE	
CLASS 1)		RANGE OF NOMINAL DIMENSIONS (± mm)								VALVOLA DI REGOLAZIONE MAGNETICA	
		≤50		50		180		400			
		1,0		1,0		1,5		2,0			
		2,0		2,0		3,0		4,0			
		3,0		3,0		5,0		6,5			
FINE		0,5		1,0		1,5		2,0			
MEDIUM		1,0		2,0		3,0		4,0			
COARSE		2,0		3,0		5,0		6,5			
TAPPED HOLES ACC. ISO 4039 / JED-152		063834		1 × B		99-03-02					
1) TOLERANCE CLASS APPLIED CROSSMARKED		064067		2 × A		98-06-03					
		DON-NO.		REV.		DATE					
9		100mm		EXPERT CONF		71610		PRODUCT TYPE		011	