


	95903701	RED
	95903711	AMBER
Part Number	95903761	BLUE
	95903781	GREEN
	95903791	WHITE
Mounting	Two hole surface mount with mounting bushes supplied.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.	
Power Consumption	9W continuous (less in flashing modes).	
Protection	Reverse polarity and 5000 watt Transient Voltage Suppressor (TVS) IP 6K6 (Protection against dust and high-pressure water jets) IP 6K7 (Protection against dust and temporary water immersion)	
Cable Length	Pre-wired with 2,5m of sheathed multi-core cable.	
Compliance	SAE J845 Class 1 (Red and amber versions) ECE R10	
See pages 80 for DuraLED® accessories.		

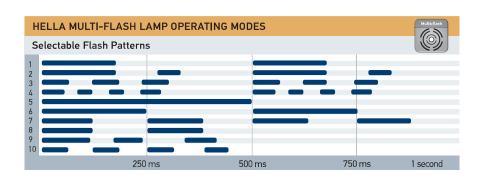

Flashing Options		
Steady state	Lamp operates as a continuous ON signal	
Independent flash	Lamp operates from an external flashing system	
Flash state	Lamp operates in the flash mode preselected by the user	
Blitz state	Lamp operates in a burst of quad flashes (pattern 4)	
The blitz mode overrides	the other operating modes and is triggered by switching the blue cable to negative (-).	

## DuraLED® Multi-flash Signal Warning Lamp

Multivolt™ warning lamps for emergency vehicles. The HELLA multi-flash range of warning lamps have 10 programmable flash modes and can be synchronised to flash alternately or in unison.





P/N 95903711 P/N 95903761



P/N 95903781 P/N 95903791