
















Part Number	98095003	WHITE
Mounting	Upright or pendant.	
Voltage	Multivolt™ for optimum brightness at input voltages from 9 to 33 volts.	
Power Consumption	High intensity mode: 12W (1A@12V DC/0,50A@24V DC) Low intensity mode: 2W (0,17A@12V DC/0,08A@24V DC)	
Actual Light Output	750 lumen	
Protection	Reverse polarity and voltage spike protection. IP 6K7 (Protection against dust and temporary water immersion) IP 6K9K (Protection against dust and high-pressure/steam jet cleaning)	
Cable Length	Pre-wired with 2,5m of sheathed multi-core cable.	
Lens Material	High impact and chemical resistant Grilamid® lens	
Compliance	(€	<u>&</u>

DuraLED* WL750 Work Lamp - Close Range

Featuring an integrated dual intensity circuit, a high level of spike protection and energy efficient Multivolt™ technology, the innovative DuraLED™ WL750 will appeal for applications where energy efficiency and reliability is a must. Features a tough, chemical resistant Grilamid™ lens, a highly impact resistant Swiss-made crystal clear polyamide with superior tolerance to chemical and long term harsh UV exposure, as well as technologically advanced thermally conductive non-metal housing.



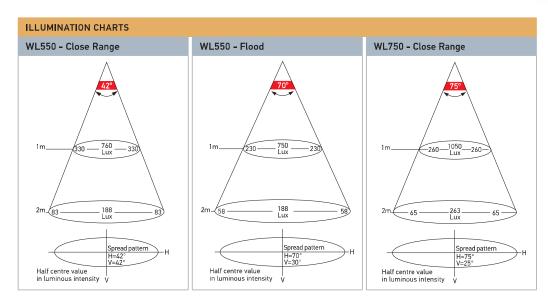



Friction mounts; easy adjustment without tools.



Completely sealed lamp/ cable entry. Marine grade stainless steel bracket.